

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

14684.47

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/830145

INTERNATIONAL APPLICATION NO.

PCT/NZ99/00177

INTERNATIONAL FILING DATE

26 October 1999

PRIORITY DATE CLAIMED

23 October 1998

TITLE OF INVENTION

DETERMINING MEAT QUALITY OF A LIVE ANIMAL

APPLICANT(S) FOR DO/EO/US

Christian John Cook

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Form PTO-2038 submitting payment
Postcard

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) 09/830145	INTERNATIONAL APPLICATION NO. PCT/NZ99/00177	ATTORNEY'S DOCKET NUMBER 14684.47
--	--	---

24. The following fees are submitted:.				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :					
<input checked="" type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO	\$1000.00				
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO	\$860.00				
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO	\$710.00				
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)	\$690.00				
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)	\$100.00				
ENTER APPROPRIATE BASIC FEE AMOUNT =		\$1,000.00			
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	94 - 20 =	74	x \$18.00	\$1,332.00	
Independent claims	10 - 3 =	7	x \$80.00	\$560.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$2,892.00	
<input type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$2,892.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$2,892.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input checked="" type="checkbox"/>				\$40.00	
TOTAL FEES ENCLOSED =				\$2,932.00	
				Amount to be: refunded	\$
				charged	\$

- a. ☐ A check in the amount of _____ to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23-3178 A duplicate copy of this sheet is enclosed.
- d. ☒ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Dana L. Tangren
Registration No. 37,246



022913

PATENT TRADEMARK OFFICE

SIGNATURE

Dana L. Tangren

NAME

37,246

REGISTRATION NUMBER

April 20, 2001

DATE

Express Mail Label No. EL 727 459 412 US

PATENT APPLICATION
Docket No. 14684.47

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Christian John Cook

Int'l. App. No.

PCT/NZ99/00177

Int'l Filing Date:

26 October 1999

For:

DETERMINING MEAT QUALITY OF A
LIVE ANIMAL

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Prior to calculating the fee for the above-identified patent application, please enter the following amendments.

IN THE SPECIFICATION

At the end of the application insert the following abstract.

--ABSTRACT OF THE DISCLOSURE

A method of providing an indication of pH levels in an animal can alternatively be used to provide an indication of stress in an animal. Since pH and temperature are related to ultimate meat quality, the method of the invention may also be used to provide an indication of ultimate meat quality. In the method, periodic measurements are obtained corresponding to the body temperature of the animal. An algorithm is applied to the measurements obtained. The algorithm cumulatively takes account of variations of body temperature over time. The results of the algorithm are compared to a pre-determined threshold. Alternatively, the results of the algorithm may be compared with a standard to provide a quantitative indication of pH, stress or meat tenderness. A system for providing an indication of meat quality/stress levels or pH levels in an animal is also provided.--

IN THE CLAIMS:

Please amend the pending claims as follows:

1. (Amended) A method of indicating pH levels in an animal, the method comprising:
 - a) obtaining measurements corresponding to a body temperature of the animal at periodic sampling intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
 - c) comparing the results of the algorithm to a predetermined threshold.

2. (Amended) A method of indicating pH levels in an animal, the method comprising:
 - a) obtaining measurements corresponding to a body temperature of the animal at periodic sampling intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
 - c) correlating the results of the algorithm with a pH standard.
3. (Amended) The method as claimed in claim 1 wherein ten or more measurements corresponding to body temperature are taken.
4. (Amended) The method as claimed in claim 1 wherein the measurements are taken for a predetermined time period.
5. (Unchanged) The method as claimed in claim 4 wherein the predetermined time period is at least 12 hours.
6. (Amended) The method as claimed in claim 4 wherein the predetermined time period extends up to 24 hours.
7. (Amended) The method as claimed in claim 1 wherein the algorithm is applied at a end of the predetermined time period.
8. (Unchanged) The method as claimed in claim 7, wherein b) further comprises:
 - determining that animal's average mean temperature reading over the predetermined time period;
 - calculating the variance between each measurement taken under a) and the mean determined; and
 - adding all variances to obtain the cumulative temperature variance score.

9. (Amended) The method as claimed in claim 1 wherein the algorithm is applied progressively.

10. (Unchanged) The method as claimed in claim 9 wherein the algorithm is applied progressively as each measurement corresponding to body temperature is taken.

11. (Amended) The method as claimed in claim 9 wherein c) is conducted after each application of the algorithm.

12. (Amended) The method as claimed in claim 1 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

13. (Unchanged) The method as claimed in claim 12 further including setting the animal aside for a predetermined animal withholding period in the event of the threshold being exceeded.

14. (Amended) The method as claimed in claim 9 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

15. (Amended) The method as claimed in claim 9 wherein the algorithm comprises:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

16. (Unchanged) The method as claimed in claim 2 wherein an indication of a pH level greater than 5.8 indicates meat of poor quality.

17. (Amended) The method as claimed in claim 1 wherein the measurements are taken on the outer part of the animal's body.

18. (Amended) The method as claimed in claim 17 wherein skin temperature measurements are taken and compensation is provided for at least ambient temperature or solar radiation.

19. (Unchanged) The method as claimed in claim 17 wherein measurements are taken in the ear canal of the animal.

20. (Amended) A method of providing an indication of stress levels in an animal, the method comprising:

- a) obtaining measurements corresponding to a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold.

21. (Amended) A method of providing an indication of stress levels in an animal, the method comprising:

- a) obtaining measurements corresponding to a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) correlating the results of the algorithm with a stress standard.

22. (Amended) The method as claimed in claim 20 wherein ten or more measurements corresponding to body temperature are taken.

23. (Amended) The method as claimed in claim 20 wherein the measurements are taken for a predetermined time period.

24. (Unchanged) The method as claimed in claim 23 wherein the predetermined time period is at least 12 hours.

25. (Amended) The method as claimed in claim 23 wherein the predetermined time period extends up to 24 hours.

26. (Amended) The method as claimed in claim 20 wherein the algorithm is applied at the end of a predetermined time period.

27. (Unchanged) The method as claimed in claim 26, wherein b) further comprises:

a) determining that animal's mean body temperature reading over the predetermined time period;

b) calculating the variance between each measurement taken under a) and the mean determined; and

c) adding all variances to obtain the cumulative temperature variance score.

28. (Amended) The method as claimed in claim 20 wherein the algorithm is applied progressively.

29. (Unchanged) The method as claimed in claim 28 wherein the algorithm is applied progressively as each measurement corresponding to body temperature is taken.

30. (Amended) The method as claimed in claim 28 wherein c) is conducted after each application of the algorithm.

31. (Amended) The method as claimed in claim 20 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

32. (Unchanged) The method as claimed in claim 31 further including setting the animal aside for at least a predetermined animal withholding period in the event of the threshold being exceeded.

33. (Amended) The method as claimed in claim 28 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

34. (Amended) The method as claimed in claim 28 wherein the algorithm comprises:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

35. (Amended) The method as claimed in claim 20 wherein the measurements are taken on the outer part of the animal's body.

36. (Amended) The method as claimed in claim 35 wherein skin temperature measurements are taken and compensation is provided for at least ambient temperature or solar radiation.

37. (Unchanged) The method as claimed in claim 35 wherein measurements are taken in the ear canal of the animal.

38. (Amended) A method of measuring stress levels in an animal, the method comprising measuring the animal's pH level using a method of claim 1, a pH level greater than 5.8 to 6.2 indicating a stressed animal.

39. (Amended) A method of providing an indication of meat quality in an animal, the method comprising:

- a) obtaining measurements corresponding to a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a), which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold.

40. (Amended) A method of providing an indication of meat quality in an animal, the method comprising:

- a) obtaining measurements corresponding to a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a), which algorithm cumulatively takes account of variations in body temperature over time; and
- c) correlating the results of the algorithm with a meat tenderness standard.

41. (Amended) The method as claimed in claim 39 wherein ten or more measurements corresponding to body temperature are taken.

42. (Amended) The method as claimed in claim 39 wherein the measurements are taken for a predetermined time period.

43. (Unchanged) The method as claimed in claim 42 wherein the predetermined time period is at least 12 hours.

44. (Unchanged) The method as claimed in claim 42 wherein the predetermined time period extends up to 24 hours.

45. (Amended) The method as claimed in claim 39 wherein the algorithm is applied at a end of the predetermined time period.

46. (Unchanged) The method as claimed in claim 45, wherein b) further comprises:
determining that animal's mean body temperature reading over the predetermined time period;
calculating the variance between each measurement taken under a) and the mean determined; and
adding all variances to obtain the cumulative temperature variance score.

47. (Amended) The method as claimed in claim 39 wherein the algorithm is applied progressively.

48. (Unchanged) The method as claimed in claim 47 wherein the algorithm is applied progressively as each measurement corresponding to body temperature is taken.

49. (Amended) The method as claimed in claim 47 wherein c) is conducted after each application of the algorithm.

50. (Amended) The method as claimed in claim 39 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

51. (Unchanged) The method as claimed in claim 50 further including setting the animal aside for a predetermined animal withholding period in the event of the threshold being exceeded.

52. (Amended) The method as claimed in claim 47 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

53. (Amended) The method as claimed in claim 47 wherein the algorithm comprises:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n).$

54. (Amended) The method as claimed in claim 39 wherein the measurements are taken on the outer part of the animal's body.

55. (Amended) The method as claimed in claim 54 wherein skin temperature measurements are taken and compensation is provided for at least ambient temperature or solar radiation.

56. (Unchanged) The method as claimed in claim 54 wherein measurements are taken in the ear canal of the animal.

For the purpose of the present invention

57. (Amended) A system for providing an indication of meat quality in an animal to be slaughtered, the system comprising:

a body mountable measurement device for obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals over a period of between 3-36 hours; and

a processor having input means for receiving the measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has output means for providing the result of the algorithm.

58. (Amended) The system as claimed in claim 57 wherein the algorithm comprises the following:

determine the animal's mean body temperature from the measurements;
calculate the variance between each measurement and the mean; and
add all variances to obtain a cumulative variance score.

59. (Amended) The system as claimed in claim 57 wherein the algorithm comprises the following:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the *instantaneous* ambient air temperature;

d is the *difference* between ear and ambient temperatures;

$fast$ is the *fast-response* filter element;

$slow$ is the *slow response* filter element;

v is the integral of *the* difference between the two filter elements;

c_1 is the time *constant* of the fast filter;

c_2 is the time *constant* of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

60. (Amended) The system as claimed in claim 57 wherein the system is embodied in an all-in-one indicator device.

61. (Unchanged) The system as claimed in claim 60 wherein the device is provided in the form of an ear tag.

62. (Unchanged) The system as claimed in claim 61 wherein the tag incorporates the measurement device.

63. (Amended) The system as claimed in claim 57, wherein the processor is provided by way of a remote computer.

64. (Amended) The system as claimed in claim 57 wherein the processor is adapted to output a numeric value from a comparison with a meat tenderness scale.

65. (Amended) The system as claimed in claim 57 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

66. (Unchanged) The system as claimed in claim 65 further including an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold.

67. (Unchanged) The system as claimed in claim 66 wherein the indicator is also operable to provide an indication that the system is functioning.

68. (Amended) A system for indicating cumulative stress in an animal, the system comprising:

a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of between 3-6 hours; and

a processor having an input to receive measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

69. (Amended) The system as claimed in claim 68 wherein the algorithm comprises the following:

determine the animal's average body temperature from the measurements;
calculate the variance between each measurement and the average; and
add all variances to obtain a cumulative variance score.

70. (Amended) The system as claimed in claim 68 wherein the algorithm comprises the following:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

71. (Amended) The system as claimed in claim 68 wherein the system is embodied in an all-in-one indicator device.

72. (Unchanged) The system as claimed in claim 71 wherein the device is provided in the form of an ear tag.

73. (Unchanged) The system as claimed in claim 72 wherein the tag incorporates the measurement device.

74. (Amended) The system as claimed in claim 68 wherein the processor is provided by way of a remote computer.

75. (Amended) The system as claimed in claim 68 wherein the processor is adapted to output a numeric value or comparison with a meat tenderness scale.

76. (Amended) The system as claimed in claim 68 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

77. (Unchanged) The system as claimed in claim 76 further including an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold.

78. (Unchanged) The system as claimed in claim 77 wherein the indicator is operable to indicate that the system is functioning.

79. (Amended) A system of indicating pH in an animal, the system comprising:
- a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of between 3-6 hours; and
 - a processor having an input to receive measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.
80. (Amended) The system as claimed in claim 79 wherein the algorithm comprises:
- determine the animal's average body temperature from the measurements;
 - calculate the variance between each measurement and the average; and
 - add all variances to obtain a cumulative variance score.

81. (Amended) The system as claimed in claim 79 wherein the algorithm comprises:

where:

t_{ear} be the instantaneous ear temperature;

$t_{ambient}$ be the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

82. (Amended) The system as claimed in claim 79 wherein the system is embodied in an all-in-one indicator device.

83. (Unchanged) The system as claimed in claim 82 wherein the device is provided in the form of an ear tag.

84. (Unchanged) The system as claimed in claim 83 wherein the tag incorporates the measurement device.

85. (Amended) The system as claimed in claim 79 wherein the processor is provided by way of a remote computer.

86. (Amended) The system as claimed in claim 79 wherein the processor is adapted to output a numeric value from a comparison with a meat tenderness scale.

87. (Amended) The system as claimed in claim 79 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

88. (Unchanged) The system as claimed in claim 87 further including an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold.

89. (Amended) A temperature sensing device comprising:
a tag having an attachment portion to extend through a body part of an animal, the tag incorporating an indicator; and
one or more animal temperature sensors disposed on/in the attachment portion for contact with the animal during use.

90. (Unchanged) The tag as claimed in claim 89 wherein the tag is an ear tag.

91. (Amended) The tag as claimed in claim 89 wherein an ambient temperature sensor is also provided on the tag.

92. (Amended) The tag as claimed in claim 89 wherein comparison means is provided for comparing the ambient temperature with the animal temperature.

93. (Amended) The tag as claimed in claim 92 wherein the indicator is disposed on the tag, the indicator being responsive to the comparison means.

94. (Amended) The tag as claimed in claim 89 wherein the tag comprises a one piece molded body.

REMARKS

By this Preliminary Amendment, applicant has added an Abstract of the Disclosure. The added abstract is supported by the abstract of the International Application to which the present national application claims priority. As required, a copy of the abstract is also attached hereto on a separate sheet of paper. The claims have also been amended to remove multiple dependencies and to place the claims into a more conventional format for U.S. prosecution. For the foregoing reasons, applicant respectfully submits that the amendments to the specification and the claims do not introduce new matter, and entry thereof is respectfully requested.

In view of the foregoing, claims 1-94 as amended herein are presented for the Examiner's consideration on the merits.

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached pages are captioned VERSION WITH MARKINGS TO SHOW CHANGES MADE.

DATED this 20 day of April 2001.

Respectfully submitted,



DANA L. TANGREN
Attorney for Applicants
Registration No. 37,246

WORKMAN, NYDEGGER & SEELEY
1000 Eagle Gate Tower
60 East South Temple
Salt Lake City, Utah 84111
Telephone: (801) 533-9800
Fax: (801) 328-1707

DLT:dfw

G:\DATA\WPDOCS3\DFW\DLT\PARK\0410PRELIMINARYAMEND_47.DOC

VERSION WITH MARKINGS TO SHOW CHANGES MADE

1. (Amended) A method of indicating pH levels in an animal, the method comprising:
- a) obtaining measurements corresponding to [the] a body temperature of the animal at periodic sampling intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
 - c) comparing the results of the algorithm to a predetermined threshold.
2. (Amended) A method of indicating pH levels in an animal, the method comprising:
- a) obtaining measurements corresponding to [the] a body temperature of the animal at periodic sampling intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
 - c) correlating the results of the algorithm with [the] a pH standard.
3. (Amended) The method as claimed in claim 1 [or claim 2] wherein ten or more measurements corresponding to body temperature are taken.
4. (Amended) The method as claimed in [any one of the preceding claims] claim 1 wherein the measurements are taken for a predetermined time period.
6. (Amended) The method as claimed in claim 4 [or claim 5] wherein the predetermined time period extends up to 24 hours.
7. (Amended) The method as claimed in [any one of the claims] claim 1 wherein the algorithm is applied at [the] a end of the predetermined time period.
9. (Amended) The method as claimed in [any one of claims 1 to 6] claim 1 wherein the algorithm is applied progressively.

11. (Amended) The method as claimed in claim 9 [or claim 10] wherein c) is conducted after each application of the algorithm.

12. (Amended) The method as claimed in [any one of the preceding claims] claim 1 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

14. (Amended) The method as claimed in [any one of claims 9 to 13] claim 9 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

15. (Amended) The method as claimed in [any one of claims 9 to 13] claim 9 wherein the algorithm [is as follows] comprises:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0=t_{ear}-t_{ambient}$$

$$fast_0=d_0$$

$$slow_0=d_0$$

$$v_0=0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1-c_1)*fast_{n-1} + c_1*d_n$$

$$slow_n = (1-c_2)*slow_{n-1} + c_2*d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

17. (Amended) The method as claimed in [any one of the preceding claims] claim 1 wherein the measurements are taken on the outer part of the animal's body.

18. (Amended) The method as claimed in claim 17 wherein skin temperature measurements are taken and compensation is provided for at least ambient temperature [and/]or solar radiation.

20. (Amended) A method of providing an indication of stress levels in an animal, the method comprising:

- a) obtaining measurements corresponding to [the] a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold.

21. (Amended) A method of providing an indication of stress levels in an animal, the method comprising:

- a) obtaining measurements corresponding to [the] a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) correlating the results of the algorithm with a stress standard.

22. (Amended) The method as claimed in claim 20 [or claim 21] wherein ten or more measurements corresponding to body temperature are taken.

23. (Amended) The method as claimed in [any one of claims 20 to 22] claim 20 wherein the measurements are taken for a predetermined time period.

25. (Amended) The method as claimed in claim 23 [or claim 24] wherein the predetermined time period extends up to 24 hours.

26. (Amended) The method as claimed in [any one of the claims 20 to 25] claim 20 wherein the algorithm is applied at the end of [the] a predetermined time period.

28. (Amended) The method as claimed in [any one of claims 20 to 25] claim 20 wherein the algorithm is applied progressively.

30. (Amended) The method as claimed in claim 28 [or claim 29] wherein c) is conducted after each application of the algorithm.

31. (Amended) The method as claimed in [any one of claims 20 to 30] claim 20 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

33. (Amended) The method as claimed in [any one of claims 28 to 32] claim 28 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

34. (Amended) The method as claimed in [any one of claims 28 to 32] claim 28 wherein the algorithm [is as follows] comprises:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

35. (Amended) The method as claimed in [any one of claims 20 to 34] claim 20 wherein the measurements are taken on the outer part of the animal's body.

36. (Amended) The method as claimed in claim 35 wherein skin temperature measurements are taken and compensation is provided for at least ambient temperature [and/] or solar radiation.

38. (Amended) A method of measuring stress levels in an animal, the method comprising measuring the animal's pH level using a method of [any one of claims 1 to 19] claim 1, a pH level greater than 5.8 to 6.2 indicating a stressed animal.

39. (Amended) A method of providing an indication of meat quality in an animal, the method comprising:

- a) obtaining measurements corresponding to [the] a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a), which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold.

40. (Amended) A method of providing an indication of meat quality in an animal, the method comprising:

- a) obtaining measurements corresponding to [the] a body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a), which algorithm cumulatively takes account of variations in body temperature over time; and
- c) correlating the results of the algorithm with a meat tenderness standard.

41. (Amended) The method as claimed in claim 39 [or claim 40] wherein ten or more measurements corresponding to body temperature are taken.

42. (Amended) The method as claimed in [any one of claims 39 to 41] claim 39 wherein the measurements are taken for a predetermined time period.

45. (Amended) The method as claimed in [any one of claims 39 to 44] claim 39 wherein the algorithm is applied at [the] a end of the predetermined time period.

47. (Amended) The method as claimed in [any one of claims 39 to 44] claim 39 wherein the algorithm is applied progressively.

49. (Amended) The method as claimed in claim 47 [or 48] wherein c) is conducted after each application of the algorithm.

50. (Amended) The method as claimed in [any one of claims 39 to 49] claim 39 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

52. (Amended) The method as claimed in [any one of claims 47 to 51] claim 47 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

53. (Amended) The method as claimed in [any one of claims 47 to 51] claim 47 wherein the algorithm [is as follows] comprises:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1-c_1)*fast_{n-1} + c_1*d_n$$

$$slow_n = (1-c_2)*slow_{n-1} + c_2*d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

54. (Amended) The method as claimed in [any one of claims 39 to 53] claim 39 wherein the measurements are taken on the outer part of the animal's body.

55. (Amended) The method as claimed in claim 54 wherein skin temperature measurements are taken and compensation is provided for at least ambient temperature [and/]or solar radiation.

57. (Amended) A system for providing an indication of meat quality in an animal to be slaughtered, the system [including] comprising:

a body mountable measurement device for obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals over a period of between 3-36 hours; and

a processor having [an] input means [to receive] for receiving the measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has [an] output means for providing the result of the algorithm.

58. (Amended) The system as claimed in claim 57 wherein the algorithm [is as follows] comprises the following:

determine the animal's mean body temperature from the measurements;
calculate the variance between each measurement and the mean; and
add all variances to obtain a cumulative variance score.

59. (Amended) The system as claimed in claim 57 wherein the algorithm [is as follows] comprises the following:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the *instantaneous* ambient air temperature;

d is the *difference* between ear and ambient temperatures;

$fast$ is the *fast*-response filter element;

$slow$ is the *slow response* filter element;

v is the integral of *the* difference between the two filter elements;

c_1 is the time *constant* of the fast filter;

c_2 is the time *constant* of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

60. (Amended) The system as claimed in [any one of claims 57 to 59] claim 57 wherein the system is embodied in an all-in-one indicator device.

63. (Amended) The system as claimed in [any one of claims 57 to 59] claim 57, wherein the processor is provided by way of a remote computer.

64. (Amended) The system as claimed in [any one of claims 57 to 63] claim 57 wherein the processor is adapted to output a numeric value from a comparison with a meat tenderness scale.

65. (Amended) The system as claimed in [any one of claims 57 to 63] claim 57 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

68. (Amended) A system for indicating cumulative stress in an animal, the system [including] comprising:

a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of between 3-6 hours; and

a processor having an input to receive measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

69. (Amended) The system as claimed in claim 68 wherein the algorithm [is as follows] comprises the following:

determine the animal's average body temperature from the measurements;
calculate the variance between each measurement and the average; and
add all variances to obtain a cumulative variance score.

70. (Amended) The system as claimed in claim 68 wherein the algorithm [is as follows] comprises the following:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

71. (Amended) The system as claimed in [any one of claims 68 to 70] claim 68 wherein the system is embodied in an all-in-one indicator device.

74. (Amended) The system as claimed in [any one of claims 68 to 70] claim 68 wherein the processor is provided by way of a remote computer.

75. (Amended) The system as claimed in [any one of claims 68 to 74] claim 68 wherein the processor is adapted to output a numeric value or comparison with a meat tenderness scale.

76. (Amended) The system as claimed in [any one of claims 68 to 74] claim 68 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

79. (Amended) A system of indicating pH in an animal, the system [including] comprising:

a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of between 3-6 hours; and

a processor having an input to receive measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

80. (Amended) The system as claimed in claim 79 wherein the algorithm [is as follows] comprises:

determine the animal's average body temperature from the measurements;
calculate the variance between each measurement and the average; and
add all variances to obtain a cumulative variance score.

81. (Amended) The system as claimed in claim 79 wherein the algorithm [is as follows] comprises:

where:

t_{ear} be the instantaneous ear temperature;

$t_{ambient}$ be the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

82. (Amended) The system as claimed in [any one of claims 79 to 81] claim 79 wherein the system is embodied in an all-in-one indicator device.

85. (Amended) The system as claimed in [any one of claims 70 to 81] claim 79 wherein the processor is provided by way of a remote computer.

86. (Amended) The system as claimed in [any one of claims 79 to 85] claim 79 wherein the processor is adapted to output a numeric value from a comparison with a meat tenderness scale.

87. (Amended) The system as claimed in [any one of claims 79 to 85] claim 79 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

89. (Amended) A temperature sensing device [including] comprising:
a tag having an attachment portion to extend through a body part of an animal, the tag incorporating an indicator [means]; and
one or more animal temperature sensors disposed on/in the attachment portion for contact with the animal during use.

91. (Amended) The tag as claimed in claim 89 [or claim 90] wherein[,] an ambient temperature sensor is also provided on the tag.

92. (Amended) The tag as claimed in [any one of claims 89 to 91] claim 89 wherein [a] comparison means is provided [to compare] for comparing the ambient temperature with the animal temperature.

ABSTRACT OF THE DISCLOSURE

A method of providing an indication of pH levels in an animal can alternatively be used to provide an indication of stress in an animal. Since pH and temperature are related to ultimate meat quality, the method of the invention may also be used to provide an indication of ultimate meat quality. In the method, periodic measurements are obtained corresponding to the body temperature of the animal. An algorithm is applied to the measurements obtained. The algorithm cumulatively takes account of variations of body temperature over time. The results of the algorithm are compared to a pre-determined threshold. Alternatively, the results of the algorithm may be compared with a standard to provide a quantitative indication of pH, stress or meat tenderness. A system for providing an indication of meat quality/stress levels or pH levels in an animal is also provided.

DETERMINING MEAT QUALITY OF A LIVE ANIMAL**FIELD OF THE INVENTION**

- 5 The present invention relates to methods and systems of using animal temperature measurements to predict meat pH and stress levels, as well as meat quality in an animal. Also provided are animal identification tags incorporating temperature sensors. These devices are also useful in monitoring the physiological state of an animal.

10 BACKGROUND ART

Livestock stress has long been recognised as having a major impact on the post-mortem quality of the animal tissue.^{1,2,3,4,5}

- 15 It is well known that stress causes the depletion of an animal's energy reserves through depletion of glycogen in muscle tissue, and causes an increase in pH. pH values in excess of 5.8 result in poor meat quality. PH values in the range 5.8 – 6.1 cause toughness and furthermore, values in the range 5.8 – 7.00 cause increasing deterioration^{A, B, C}. Qualities affected include:

20

Colour: the higher the ultimate pH the darker the meat colour. Customer demand is for bright red, rather than dark, meats;

Keeping ability: which decreases with the increase in pH;

Texture: high pHs tend to produce rubbery, watery meats; and

- 25 Tenderness: both high and low pH meats may be tender.

However, because of the other disadvantages associated with high pH, low pH tender meat is preferable. High pH, poor quality meats are not suitable for the export market and are often down-graded resulting in multi-million dollar losses to the primary meat sector each

30 year.

Major causes of stress include rounding up and lairage of animals on the farm, crowded transport conditions, driving animals over long distances without rest, and handling procedures at processing plants, such as prodding and washing. It has also been recognised
5 that by feeding an animal prior to slaughter, muscle energy reserves can be restored and down-grading avoided.⁴ In a ruminant animal such replenishment can take more than a day. In a monogastric, this is normally quicker. If a technology existed that could recognise at risk animals prior to processing then these animals could be treated.

10 US Patent No. 5,458,418, and US Patent No. 5,595,444 disclose methods of detecting poor meat quality in animals using infrared thermography. A single thermographic temperature measure is taken of an animal prior to slaughter. Animals with a thermograph outside a predetermined test temperature range are rejected as likely to have meat of poor quality. Similarly, for a group of animals, animals showing a significant deviation in mean image
15 temperature compared to the group mean temperature are rejected as likely to have meat of poor quality.

The infrared thermography methods disclosed in these patents are subject to a number of drawbacks. A one point temperature measurement prior to slaughter cannot reflect thermal
20 history, nor accurately predict its effect on meat quality. The single reading may detect acute stress shortly prior to slaughter but not cumulative stress over a period of time. A further drawback is that an animal may be rejected for slaughter as a consequence of its mean image temperature in comparison with the group and not by reference to an absolute standard. Thus, animals may be unnecessarily downgraded. It is for this reason that
25 infrared thermography has not performed well in practice as a predictor of meat quality.

It is an object of the present invention to provide a method for identifying stressed animals, or at least to provide the public with a useful choice.

The present applicant has found that in all animals subjected to stress, body temperature changes produce either an increase or decrease in skin heat loss. Changes in body temperature both up and down from the homeostatic norm are energetic that is energy must be used to re-establish norm by pulling body temperature up or lowering it (heat production or heat loss). Often these adjustments are quick and not reflected in deep body temperatures. They are, however, reflected in skin and surface temperatures and peripheral blood flow mechanisms ie. in the outer body. High energy expenditure can be made with little change seen in core temperatures. Falls in body/ skin temperature are as (if not more) energetically demanding than rises.

In terms of stress measurement both a fall, or rise, in skin/body temperature can be an important indicator of stress, and such changes can be important both acutely and chronically (i.e. a number of changes) over time. In terms of predicting meat quality, cumulative stress, or more specifically cumulative energy expenditure, is more important than acute stress (other than extreme acute stress). A cumulative measure of skin/body temperature changes (both up and down) can provide an index over time of the amount of energy spent by the animal. The more energy spent by the animal over a 24 hour period prior to its slaughter the more likely that the meat will be of poor quality if the animal is not allowed an additional period to replenish its energy stores via eating.

As stress has energetic consequences it can influence production return and can have implications for animal welfare. A simple tool for measuring and offering quality control on these would be useful.

Animals that have meat ultimate pH levels in an acceptable range (pH 5.5 – 5.8) show a weak correlation between body temperature at slaughter and the actual meat pH. This correlation is greater if changes in body temperature are integrated over time, preferably for at least 12 hours prior to slaughter. A convenient way to do this is to use a cumulative variance around an averaged body temperature for an individual animal. Higher cumulative variances in temperature predict higher pH meat, a measure that relates to the amount of

glycogen residing in the meat. Based on the applicant's findings of the correlation between pH, temperature and stress, it is proposed that animal sensor devices may be produced to monitor body temperature, and its variance, as a measure of an animal's stress level and as a predictor of meat quality.

5

Animal temperature sensors are known in the art. For example, in US 3,781,837 and US 4,865,044, *tympanic* temperature sensors are employed. In US 4,854,328, a temperature sensor device is implanted at the base of an animal's skull. An ear tag component is provided which incorporates a unit for receiving signals from the implanted sensor, and indicating means responsive to the generated signal. In the case of US 4,865,044, an ear tag is employed to contain the bulk of the temperature sensor circuitry, at a position remote from the tympanic animal temperature sensor.

10

15

The use of *tympanic* and surgically implanted sensor devices is usually contraindicated because of the high invasive load on the animal. Further, dislodgement problems are also encountered with *tympanic* sensors. Where implanted devices are used, incisions can easily become infected and the implantation procedure is more difficult to carry out.

20

Accordingly, it is a further object of at least a preferred embodiment of this invention to provide a temperature sensing device which overcomes some of these disadvantages, or again at least provides the public with a useful choice.

In a first aspect, the present invention may be broadly said to consist in a method of providing an indication of pH levels in an animal, the method comprising:

25

- a) obtaining measurements corresponding to the body temperature of the animal at periodic time intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold or correlating the results of the algorithm with a pH standard.

30

T00240 "04240" 093045

One simple algorithm is to calculate cumulative temperature variance which may be calculated in a number of ways. A simple method discussed in greater detail below comprises:

- 5 a) measuring the animal's body temperature at intervals over a period of time;
- b) determining that animal's average body temperature reading over that period of time;
- c) calculating the variance between each temperature measurements taken under a) and the average determined in step b); and
- 10 d) adding all variance values calculated according to step c) to obtain the cumulative temperature variance score.

15 To calculate cumulative temperature variance at least two temperature readings must be taken. For accuracy, it is preferred that multiple readings of 10 or more are taken in a predetermined time period.

From our discussions above, the reader will appreciate that the pH level predicted is an indicator of meat quality, with a pH level greater than 5.8 indicating meat of poor quality.

- 20 In a further aspect, the present invention provides a method of providing an indication of stress levels in an animal, the method comprising:
- a) obtaining measurements corresponding to the body temperature of the animal at periodic time intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm
25 cumulatively takes account of variations in body temperature over time; and
 - c) comparing the results of the algorithm to a predetermined threshold or correlating the results of the algorithm with a stress standard.

In another aspect, the present invention provides a method of measuring stress levels in an
30 animal, the method comprising measuring the animal's pH level using a method of the

invention, a pH level greater than 5.8 to 6.2 indicating a stressed animal.

In accordance with a further aspect of the present invention there is provided a method of providing an indication of meat quality in an animal, the method comprising:

- 5 a) obtaining measurements corresponding to the body temperature of the animal at periodic time intervals;
- b) applying an algorithm to the measurements obtained from step a), which algorithm cumulatively takes account of variations in body temperature over time; and
- 10 c) comparing the results of the algorithm to a predetermined threshold or correlating the results of the algorithm with a meat tenderness standard.

By way of example, the New Zealand lamb AC & A standard may be used as a meat tenderness standard. Outputs from the algorithm may be pre-calibrated to the standard so that in use, the result from the algorithm may be compared with the standard to give an
15 indication of meat tenderness.

- In a specific form of the invention, the algorithm may calculate a mean of the measurements obtained in step (a); calculate a variance of each measurement from the calculated mean; and integrate the variances over time. In one preferred form of this
20 embodiment, the measurements may be taken for a predetermined time period and a final mean calculated at the end of that predetermined time period. The integration of the variances will then be conducted over the predetermined time period. In an alternative version of this simple algorithm based on variances from a mean temperature, a running mean may be progressively determined from the measurements obtained in step (a). At
25 each stage, the variation of the temperature measurement from the previous calculated running mean may be integrated over time. This reduces the memory requirements of the device to implement the method.

- More sophisticated algorithms may be employed which depart from the simple method of
30 calculating the variances from the mean. These more sophisticated algorithms may

determine a cumulative value which is dependent on progressive changes or trends in the measurements obtained from step (a), rather than being dependent on absolute temperature measurements. This avoids the need to calibrate the temperature sensors.

- 5 Thus the measurements obtained from step (a) may or may not be actual temperature measurements. For example, in any embodiment utilising absolute temperature values, relatively inexpensive thermistors may be employed to obtain the temperature measurements with the circuitry in which the thermistors are employed compensating for any variation in the measured temperature from the real temperature. This calibration may
10 be effected by calculating a correction coefficient and programming this into a microprocessor employed in the circuit.

In more sophisticated algorithms which rely on temperature changes rather than absolute values, no calibration may be required.

15 The body temperature is preferably measured on the outer part of the animal since temperature adjustments to accommodate stress appear to be more pronounced on the outer part of the animal compound to core temperatures. In a most preferred form of the invention, the skin measurements may be taken e.g. on the ear of the animal.

20 In any embodiment in which the outer body temperature is determined on the skin, a correction for the effects of ambient temperature will be required. This can be achieved through the use of an ambient temperature sensor. Additionally, correction for solar radiation may also be required where the skin temperature sensor is exposed to sunlight.

- 25 The body temperature may also be measured in more internal locations such as the inner ear. This may avoid the requirement for ambient temperature compensation. However stress induced temperature fluctuation may be less and more sensitive temperature measuring devices may be required when measuring in this position.

In the simplest of embodiments where the algorithm is applied at the end of the predetermined time period, a device implementing the method may be provided with an indicator to indicate the results of the comparison step conducted in step (c). If the failure of step (c) is indicated by way of a flashing light or audible alarm then the same facility may be used to periodically indicate the correct functioning of the device. For example, where a frequently flashing light indicates failure of step (c), an intermittent flashing of the same light may merely indicate that the device is functioning. A non flashing light will thus indicate to an attendant that the device has malfunctioned or has lost power.

- 10 In the embodiment where the algorithm is progressively employed to the measurements obtained in step (a), step (c) may be employed after each implementation of the algorithm. Thus, if the animal fails the test at any point throughout a predetermined time period then an indicator may be employed to show that the animal has failed the test. The method may then be reemployed starting at the beginning of the predetermined time period. If at any time during the retest the animal fails step (c) again then the same indicator will indicate failure of the test and the process will be repeated. However, should the animal progress to the end of the predetermined time period without failing step (c) then an alternative indication may be given that the animal has passed the test for the full duration of the predetermined time period and thus is fit for slaughter. Suitably once the animal has reached this point it should be slaughtered without further delay and without the opportunity for the animal to incur further stress.

- 25 In one specific implementation of the method, it may not be necessary to wait for the full duration of a specific predetermined time period if the time period from rounding up to delivery of the animals to the abattoir is less than the predetermined time period. In the method which progressively applies the algorithm, if the animal has not yet failed the test during the time thus far and if the conditions before the testing started were such that the animals were unlikely to be subjected to stress, then the animals might proceed to immediate slaughter.

- 9 -

In accordance with another aspect of the present invention, there is provided a system for providing an indication of meat quality in an animal to be slaughtered, the system including:

a body mountable measurement device for obtaining measurements corresponding to the
5 body temperature of the animal at periodic time intervals over a period of 3-36 hours;
a processor having an input means to receive the measurements from the measurement device, the processor operable to implement an algorithm to the
measurements, which algorithm cumulatively takes account of variations in body
temperature over time, wherein the processor has an output means for the result of the
10 algorithm.

The system may be implemented in an all-in-one indicator device. Such a device may be mounted on the animal eg ear tag, tail tag or provided on a collar. The tag may also incorporate the measurement device. In an alternative form of the invention, the
15 measurement device may be remote from the tag. The measurements may be sent to the processor by way of a transmitter or by a cable. In one preferred form of the invention, the measurement device may be provided by way of a thermistor to be deposited in the inner ear canal of the animal with a cable connected to an ear tag which houses the processor.

20 In yet another embodiment of the present invention, the processor may be provided by way of a remote computer. In this embodiment, a device for mounting on the animal will suitably incorporate transmitters to send the measurements to the remote computer. The remote computer may be a field device which is able to sense and account for ambient temperatures and solar radiation. Alternatively, a separate field device may be provided
25 to send information relating to ambient temperature and solar radiation to a remote processor. The remote computer also receives the measurements from the measurement device provided on the animal either directly or via the field device.

The output from the processor may be in any of various forms. A simple numeric value
30 may be output for the attendant to decide whether or not it falls within acceptable limits.

- 10 -

The value might be compared to a meat tenderness scale for quantitative assessment as to whether it falls within acceptable limits. However, in most embodiments it is preferred that the processor is operable to compare the outputs of the algorithm to a predetermined threshold. The system may also include an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold. Any of the features described in connection with the above-described method of indicating meat quality may be implemented in the system.

In accordance with yet another aspect of the present invention, there is provided a system for indicating cumulative stress in an animal, the system including:

a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of 3-36 hours;

a processor having an input to receive measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

The system for providing an indication of stress may be implemented in any of the various forms discussed above for the system providing an indication of meat quality. Such a system for indicating cumulative stress might have particular application to animals where the effects of stress might be dangerous either to the animal itself, to other animals or in particular to humans. For example, horses might be more prone to erratic behaviour and a danger to their riders if they are subjected to sustained periods of stress. A system implemented in the form of an all-in-one indicator device may provide simple indication to the rider that the animal is stressed and needing rest or food.

Preferably, the processor is also operable to compare the output of the processor with a predetermined threshold. The system preferably incorporates an indicator to provide indication that the predetermined threshold has been exceeded. In an all-in-one indicator device, this may be implemented by a simple visual indicator such as a flashing led. In an

- 11 -

embodiment with a remote computer then the output of the computer may provide the identification numbers of those animals which have exceeded the threshold.

In accordance with a still further aspect of the invention, there is provided a system of
5 providing an indication of ultimate meat pH of an animal, the system including:

a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of 3-36 hours;

a processor having an input to receive measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm
10 cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

In a further aspect, the present invention provides:

- 12 -

A temperature sensing device including:

- 5 a tag having an attachment portion to extend through a body part of an animal, the tag incorporating an indicator means; and
one or more animal temperature sensors disposed on/in the attachment portion for contact with the animal during use.

10 Preferably, the tag is an ear tag. Preferably, an ambient temperature sensor is also provided on the tag. Further, the tag may be provided with comparison means to compare the ambient temperature with the animal temperature. An indicator may also be disposed on the tag, the indicator being responsive to the comparison means.

15 Desirably, the tag comprises a one piece moulded body.

Also contemplated by the present invention is the use of the temperature sensing device in the methods of the invention as described above.

20 This invention may also be said broadly to consist in the parts, elements and features referred to or indicated in the specification of the application, individually or collectively, and any or all combinations of any two or more of said parts, elements or features, and where specific integers are mentioned herein which have known equivalents in the art to which this invention relates, such known equivalents are deemed to be incorporated herein as if individually set forth.

25

The invention consists in the foregoing and also envisages constructions of which the following give examples.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described with reference to the accompanying drawings in which:

5

Figure 1 is a diagrammatic view of an embodiment of a temperature sensing device of the present invention from the inward facing or “animal” side.

Figure 2 is a side view of a temperature sensing device of the present invention.

10

Figure 3 is a diagrammatic view of an embodiment of a temperature sensing device of the present invention from the outward facing or “environment” side.

Figure 4 is a graph plotting the ultimate pH of meat with temperature variance from Example 1.

15

Figure 5 is a graph plotting the results of Example 2, correlating variance in skin temperature around a mean value over 24 hours in sheep with ultimate pH.

20

Figure 6 is a graph plotting the results of Example 3 showing the mean and SD rectal temperatures of adult sheep with similar levels of infection taken at the same time each day at the same ambient temperature. The ear skin temperatures are plotted against corresponding the rectal temperatures.

25

Figure 7 is a circuit diagram of a circuit which may be implemented in a temperature sensing device which is slightly modified from the device shown in Figures 1 to 3.

Figure 8 is a graph plotting temperature readings and the output of a preferred algorithm in accordance with a preferred embodiment of the present invention.

5

DETAILED DESCRIPTION

As summarised above, the present invention is based upon the applicant's unexpected finding of the correlation between stress, body temperature and variance over time of body temperature, pH and ultimately meat quality in livestock. This finding has important consequences for the agriculture industry generally and the primary meat industry in particular. By identifying stressed animals prior to slaughter, appropriate management techniques can be used to reduce the animals' stress level. This will ensure a higher quality meat product after slaughter.

10
15

The applicant's findings also have broader application to methods of predicting or measuring pH levels based on the pH/temperature correlation.

Animal body temperature may be measured using a broad range of temperature sensors including tympanic, rectal, colonic, and skin sensors. Sensors ingested or inserted in bodily canals are not widely used due to the difficulty of inserting them, and because they are easily dislodged or expelled by an animal. Preferably, a skin temperature measurement is taken to avoid these invasive and less desirable alternative techniques. Conveniently, temperature may be measured using a temperature sensing device of the present invention discussed below. However, with temperature measurements from the skin as opposed to the body core, the ambient environmental temperature must be taken into account. The slope of prediction between variance in temperature and ultimate pH of meat shows consistency with temperature change. However, it shifts to the right, or to the left, depending upon the environmental conditions including temperature and solar radiation.

20
25
30

Measures of animal and ambient air temperature or measurements corresponding thereto, and usefully over a predetermined time period are required. On the farm, any time interval, regular or irregular, desired may be selected. Continual on-line monitoring not limited to a specific time period is contemplated. Alternatively, monitoring for selected time periods of hours, days, weeks or even months is feasible.

In the slaughtering context, the correlation between body temperature at slaughter and pH levels of meat are stronger if the measures are integrated for an extended period, which may be up to 2-5 days, but is preferably between 3-36 hrs, more preferably 8-24 hrs and most preferably at least 12-14 hours prior to slaughter.

Within the monitoring period it is preferred that measurements be taken at regular intervals such as hourly, half hourly, every quarter hour, every ten minutes or the like. The preferred regime is no more frequent than every ten minutes.

The applicants have found that skin/body temperature may reflect metabolic activities associated with the stress response. A greater stress response is likely to result in a greater metabolic activation to re-establish the homeostatic norm either through a greater generation of heat and elevation of body temperature or heat loss and a lowering of body temperature. Except in circumstances of pathophysiological heat exhaustion, dehydration or febrile responses these changes are usually short-lived in nature and small in magnitude.

Measurements of animal body-temperature made at discrete points of time during the pre-slaughter period are unlikely to give a representation of the stress experienced cumulatively over the preslaughter period. A single experienced stressor is unlikely to cause meat quality problems whereas cumulative stressor exposure over a period of time, without replenishment, will do so.

Correspondingly, single point temperature measures may well coincide with either a single stressor induced peak or a trough between numerous stressor induced peaks in body

temperature, either way unlikely to provide an accurate assessment. It is for this reason that measurements over a time period prior to slaughter are required.

The applicant hypothesised that the best measure of energy used, and by correspondence glycogen depleted from muscles and predicted ultimate pH, would be the variation in body (or skin) temperature over time. The variation will represent both periods in which skin/body temperature has fallen and the required energy consumption to correct, and periods in which body temperature has risen, reflecting increased metabolism and its energy consumption and necessitating heat loss.

A measure of the temperature variation (variance) can be calculated in numerous ways. However, a simple cumulative measure using single measure sample period repeated over the required time is as follows:

- find the arithmetic average (x) of all the pooled samples (y_1, \dots, y_n) where 1 = the first sample variable y and n the last in the sequence, which is also the total number of samples. $x = \text{sum}(y_1 + y_2 + \dots y_n) / n$
- measure and record the variance (v_1, \dots, v_n) of each sample ($y_1 \dots y_n$) from this average (x) (i.e. the difference between each sample and the average). Irrespective of whether each sample point is less or more than the average the difference will be indicated as a positive number. $v_1 = x - y_1, \dots, v_n = x - y_n$.

A further weighting may to be given to each variance dependent upon whether it is above or below the average. Values above the average or mean have energy associated both with generation (variance) and the energy loss through heat transfer needed to return to the average. As such their variance weighting should be greater than those below the average that utilises energy only in returning to the average baseline.

These numbers are then cumulatively added to give a variance score over a predetermined time period. This time period will usually need to be 12 hours or greater to provide meaningful interpretation as to glycogen depletion and energy usage as discussed above.

$$vc = \text{Sum}(v1 + v2 + \dots + vn)$$

5

The greater the cumulative score, the greater the energy usage that has occurred and correspondingly the greater the likelihood of both glycogen depletion and subsequent post-slaughter poor meat quality.

- 10 To calculate the prediction of meat quality a weighting should also be given to the variance depending upon the environmental conditions. Increasing ambient temperatures are associated with a subtractive weighting, decreasing ambient temperatures with an additive weighting. Solar radiation can also be accommodated for using this method.

- 15 The weighting for ambient temperature is approximately ± 0.2 pH unit per 3°C above and below 20°C (standard weighting of zero).

- Based on the applicant's determination of a correlation between temperature and pH, the cumulative effects of variation in body temperature can be manually or electronically
20 correlated with ultimate meat pH using a standard. For example, standardised against a Mettler Toledo pH meter and standards (Mettler Toledo GmbH, Steinbach). Further it could be correlated to any other measure of hydrogen ion concentration, typically using a glass electrode, but other methods including ion selective field effect transistor electrodes could be used. As the increasing pH in meat is correlated with an increase in lactate, a measure
25 of lactate also provides suitable correlation.

The pH level measured can be used as an indicator of an animal's stress level, a pH of greater than 5.8 indicating stress.

Where an animal is found to be stressed, remedial action to lower stress levels can be taken prior to slaughter. A period of feeding should alleviate stress by replenishing glycogen in muscle tissue. This action helps prevent or eliminate post-slaughter meat quality problems.

- 5 The methods of the invention may be used in relation to a broad range of animals including domesticated livestock such as sheep, cattle, deer, pigs, chickens, turkeys, ducks, emus, ostriches, rodents, chinchillas and additionally rabbits, possums, goats and the like, as well as the feral counterparts of all of these. Preferred livestock for analysis are sheep, cattle, deer and pigs.

10

As noted above, the present invention also provides a temperature sensing device depicted generally by the numeral "10" in the accompanying figures. The sensing device (10) is useful in the methods of the invention for measuring temperature. A sensing device (10) of the invention includes a tag represented by the numeral "12". The tag (12) may comprise any of the tags known in the art which can be attached to the skin of an animal, including through the skin, folds thereof, or tissues. Examples of useful tags include ear tags, back tags and tail tags.

15

Ear tags are conveniently employed.

20

Two part ear tags are disclosed in US Patent No. 4,854,320 or three part tags of the type disclosed in US Patent No. 5,675,920 may be used. One part tags wherein an attachment portion of the tag passes over the top of, and back through the ear and tag are also feasible.

25

Currently preferred is a two part tag as illustrated in Figure 2. For example, the Tru-Test7 perma-flex ear tag (Tru-Test Limited, 241 Ti Rakau Drive, East Tamaki, Auckland, New Zealand). The tags are generally useful for domestic livestock such as sheep, cattle, deer and goats but are not limited thereto.

30

The tag (12) incorporates at least one attachment portion (14). The attachment portion (14) comprises any suitable attachment means known in the art including any form of skin

piercing. The attachment portion (14) may be selected according to the position of attachment on the animal. Suitable attachment portions may include shafts, bands, hooks insertable into or through selected animal tissues, or attachment portions adherable thereto.

For example, tags could be superglued to the skin of an animal at a desired location.

- 5 Preferably, the attachment portion (14) includes a shaft (17) insertable through the ear of an animal. Where necessary backing member(s) (15) may be used to securely fasten the tag to the ear of the animal. The backing member (15) may include a further tag body in some cases. Alternatively, in one embodiment discussed above, the attachment portion (14) may be secured back to the tag (12).

10

The tag (12) incorporates at least one animal temperature sensor (20) disposed on or in the tag. The sensor (20) is disposed at any location on or in the tag (12) which ensures contact of the sensor (20) with the animal during use. In one embodiment the sensor (20) is in the vicinity of the attachment portion (14). In a preferred embodiment shown in Figure 2, the
15 sensor (20) is provided on or in the shaft (17) of the attachment portion (14). The location of the sensor (20) in the shaft (17) ensures close contact of the sensor with the animal ear.

15

The temperature sensor (20) itself may comprise any suitable sensing means known in the art including electronic sensors or thermistors. Temperature sensors suitable for use in the
20 invention are disclosed in US 4,854,328 and US 4,865,044 at least.

20

As discussed above, where outer body temperature readings, such as skin temperature are used, then the ambient environmental temperature should also be measured. For example, on a hot day an animal's body temperature will rise. If not correlated with air temperature
25 this would falsely indicate a stressed or sick animal. Logically therefore, a more accurate assessment of an animal's body temperature can be made if the ambient air temperature is taken into account.

25

Accordingly, while a tag (12) without an ambient temperature sensor is contemplated, the
30 tag (12) preferably further includes at least one ambient temperature sensing means (18)

30

provided on the tag (12) at any position suitable for measuring ambient air temperature.

Most usually, the ambient temperature sensor (18) will be disposed on or in the side of the tag (12) away from the animal, as shown in Figure 1. Temperature sensors of the type used for animal temperature measurement may also be employed for ambient temperature measurement. Such other air temperature sensors as are known in the art may also be used.

Correlation of both body and air temperature data can be performed manually by an observer. However, it is preferred that the sensing device (10) further include comparison means for correlating temperature data from both the air and body temperature sensors (18 and 20). Usually, the comparison means will be a microprocessor (22) but application specific electronics could also be implemented.

In order to resolve difficulties associated with heating of the ear tag due to solar radiation, the animal temperature sensor could instead be located some distance from the tag. This is easily done by positioning the body of the tag just inside the ear flap and the sensor just inside the ear canal. The sensor can be located on the end of a flexible wire and glued to the ear. Ambient temperature effects can be minimised by covering the sensor with a small dot of foam insulating tape.

The data output of the body and/or temperature sensor means (18 and 20) may also or alternatively, be sent to remote evaluation means. This will generally require the coupling of the sensor means (18 and 20) to a transmitter. Temperature data as well as animal identification data is transmitted to a remote processor such as a computer. In the case of tagged animals this will permit remote monitoring and checking to be performed, continuously if desired.

In the presently preferred embodiment, the temperature information gathered by both sensors (18 and 20) is relayed to microprocessor (22). In this regard, refer to Figure 7 which illustrates the circuit diagram for a device according to a slightly modified embodiment. While changes would be required to implement this circuit in the present

embodiment the principles of operation are the same. Reference is also made to US 4,854,328, US 4,865,044 and US 3,781,837 which disclose circuitry which could be adapted for this use.

- 5 The microprocessor (22) is in turn in responsive communication with indicator means (16). The indicator means (16) may be selected from a broad range of currently known indicators including electronic, visual and acoustic signal generators but are not limited thereto.

In the case of an electronic indicator this may be a device programmed to give out a
10 perceivable signal once a certain predetermined temperature is reached.

In one embodiment, the indicator means (16) may comprise a temperature responsive substance which generates a visual, electromagnetic, electrochemical, or other measurable
15 signal when a predetermined temperature is exceeded. Visual changes such as a change in colour are conveniently employed. Colour change indicators will generally comprise a substance which undergoes a change in state at a precise and predetermined temperature.

In a further embodiment, the indicator means (16) may comprise a plurality of regions, generally less than 10 and preferably less than 5, which undergo a change of state at
20 precise, graduated predetermined temperatures. When colour changes are employed this may usefully result in the graduated change in colour of the indicator from a small portion to substantially the entire indicator. In an embodiment which progressively applies the algorithm resulting in a progressively increasing cumulative value, this progressive colour change might effectively indicate the progressively increasing cumulative value.

25 Alternatively, the colour change might be simply representative of increasing animal temperature. Alternatives include a "traffic light" indicator which, for example, changes from green, to amber, and finally to red as the threshold is exceeded. Other possibilities include opaque materials becoming transparent or translucent to reveal underlying colours as the cumulative value increases or the temperature changes.

The indicators may undergo irreversible changes, especially when continuous monitoring is not contemplated.

Further visual indicator means (16) include, for example, LEDs or flashing lights. Alternatively, audible alarms may be triggered. Combinations of all such indicator means are also feasible. Also contemplated are outputs readable at remote locations. A wide range of indicator means (16) which may be employed in the invention are disclosed in the following US patents: US 3,781,837, US 4,865,044, US 4,854,328 and US 5,675,920 amongst others.

Depending on the types of sensors, indicator and comparison means employed, the sensor device may require a power source. While solar powered devices are contemplated, at least one battery will usually be incorporated into the sensing device (10). In the preferred embodiment depicted in Figure 1, a battery "24" is employed. A wide variety of batteries (24) are currently available and suitable for use in the ear tag (12).

Where batteries (24) are employed as a power source it is important to identify when a battery (24) has malfunctioned or expired. An indicator showing when the power source has failed would therefore be useful. An appropriate indicator is identified by the numeral "26" in Figure 1. As with the sensing means, useful indicators include electronic, audio and visual signals as discussed above. For example, when the battery has failed an audible signal could be emitted, driven by a small backup power source. Preferably however, the signal is a visual colour change signal, or extinction of an "OK" LED signal. The colour change may be signalled as an alternative to the temperature colour change signal, or in addition to it provided that the colour changes are distinctive.

The tag(12) may further incorporate communication means. The communication may comprise the export of data and/or for the import of energy. Accordingly, uni- and bi-directional communication means are contemplated. Suitable communication means are identified in the US patents referenced above. They include at least one transmitter and/or

antenna but are not limited thereto. In a preferred embodiment of the present invention an antenna (28) is included in the tag (12). The antenna (28) preferably allows bi-directional data communication with the tag (12).

- 5 In one use, the antenna (28) provides a means of recharging the battery (24) by use of electromagnetic radiation or an externally applied radio frequency field. In a further use, the antenna (28) permits export of data for logging purposes. Communication may be to remote data logging means to facilitate off-site monitoring of animals. Exported data signals may also provide information relating to the identification number of the animal.

10

It is also customary for tags (12) to include animal identification means. In a simple form this may comprise a unique visual identification means such as a symbol, colour or pattern. Preferably, the visual ID comprises an alphanumerical number (30) as shown in Figure 3. Alternate identification means include electronic identifications, or electronically readable
15 signals which uniquely identify a given animal. Any such electronic signals which are known in the art may be used. One embodiment preferred is the inclusion of a barcode (32) on the tag (12) as shown in Figure 3. This facilitates scanning of the tag (12) and correlation of data with pre-existing information for the uniquely identified animal. Specific identification systems can also assist in discouraging theft of stock.

20

The electronic componentry of the ear tag (12) comprising any of all of the antenna (28), battery (24), battery indicator (26) and microprocessor (22) may be provided on or in the tag (12) conveniently on a circuit board (34). Preferably, the componentry is provided within the tag (12) to prevent damage. This may be achieved by covering the componentry
25 once fixed on the tag (12). The cover may be permanently fixed in place or can be releasable. A releasable cover would allow for battery replacement. If the cover is fixed, this may be achieved by gluing, plastic welding or other known fastening means.

Conveniently, the tag (12) is a one piece moulded body.

30

In a preferred form the tag (12) comprises an integrally moulded body with the componentry sealed therein.

In use, the temperature sensors (18 and 20) of the ear tag (12) will collect temperature data which is communicated to the microprocessor (22) to perform the necessary cumulative algorithms discussed above.

If the outcome of the calculation is a temperature threshold value that indicates a pH of poor quality (greater than 6.2) then a power surge is directed to the indicator to cause an electronic, visual or audible change. The livestock owner or manager can then take steps to reduce the stress level in the animal through appropriate feeding regimes.

High temperature readings may also indicate infected or otherwise unhealthy animals. For pathophysiological measurement either a spike or chronic rise in body temperature can be an important diagnostic tool of disease while longer term tracking can show whether therapeutic treatment of the disease is effective. The tags can therefore serve the dual purpose of signalling the state of health of the animal apart from stress responses. In related applications, the tags can be used in monitoring the status of other processes in animals which at some point are characterised by temperature changes. An example of this is measurement of hormone changes or cycles such as oestrous in an animal.

The useable lifetime of the tag is approximately one month. The lifespan of the tag can be extended through the incorporation of a battery (24) able to be recharged by electromagnetic radiation or radio frequency in the field. Accordingly, both disposable single measure tags (12) and reusable tags (12) are contemplated herein. Disposable tags (12) may be particularly appropriate for short term use in the pre-slaughter period. Custom electronics could greatly increase this lifetime. Once tag identification of a problem occurred, an electronic ID associated with the tag could activate automatic drafting of the animal from a group for remedial action.

Figure 7 is a circuit diagram of a circuit (40) appropriate for use in a tag such as that illustrated in Figures 1 to 3, except without the antenna (28).

At the heart of the circuit is microprocessor (42) which receives inputs from ear temperature sensor TH2 and ambient temperature sensor TH1. The microprocessor (42) implements an algorithm which cumulatively takes account of temperature variations in an animal over time. Simple algorithms integrating variations from a mean body temperature over time have been described above. Also described below is a more sophisticated algorithm which may be implemented by microprocessor (42). As an additional input to the microprocessor (42), there is provided a clock (44) which controls the sampling interval at which the microprocessor (42) receives temperature readings from thermistors TH1 and TH2.

The circuit (40) is driven by battery (46) which provides power to the circuit for up to six weeks. A lamp 48 such as LED D1 may flash at intermittent intervals, say every 5 to 10 seconds, to indicate that the circuit is operating. The LED D1 may also be used to provide an indication when the output of the algorithm is such as to exceed a predetermined threshold. In that case, the LED may flash frequently, say every 1 second. This will attract the attendant's attention so that the stressed animals will not be put to immediate slaughter but instead rested and revived as required.

The circuit (40) also includes an optional memory unit (50) which can store up to 4,000 temperature measurements. This will be implemented if the tag is to be used as a diagnostic tool. The data stored in the memory unit (50) may be uploaded via the optional interface (52).

A more sophisticated algorithm for obtaining a cumulative measure of temperature variations in an animal will now be described.

Variable definitions:

Let t_{ear} be the instantaneous ear temperature

Let $t_{ambient}$ be the instantaneous ambient air temperature

5

d is the difference between ear and ambient temperatures

$fast$ is the fast-response filter element

$slow$ is the slow response filter element

v is the integral of the difference between the two filter elements

10

c_1 is the time constant of the fast filter . The time constants are selected according to sampling interval time and threshold detection level.

c_2 is the time constant of the slow filter

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 > c_2 < 1$

15

n is the count for the sampling time interval

Initialise:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

20

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

At each sampling time interval:

25

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

30

$$v_n = v_{n-1} + (fast_n - slow_n)$$

The microprocessor is programmed to repeat the algorithm regularly at each sampling interval until a predetermined time period has elapsed. If at any time during this predetermined time period v_n exceeds a predetermined threshold then the animal is taken
5 to be stressed and lamp (48) of circuit (40) will flash frequently to provide appropriate indication to the attendant. The timer will reset and remain at 0 until v falls below the threshold, at which point the timer will start counting for a predetermined animal withholding period, the timer will again be set to zero. In this way it is ensured that the animal effectively recovers from stress, prior to slaughter.

10 If, at the elapse of the predetermined time period v_n is less than the threshold then the animal is taken to be within acceptable cumulative stress limits. The lamp (48) may provide an indication that the threshold has not been exceeded.

15 In the above described algorithm, the entire history of temperature readings is not required, only the most recent reading. Thus, the algorithm requires only three storage locations to be preserved between time steps.

20 The use of the filter elements removes any dependence on absolute reference temperatures and the need to calibrate the temperature sensors. The filter elements detect trends rather than absolute temperature values.

The filter elements are more resistant to the effects of measurement noise than simple threshold detection.

25 Figure 8 illustrates an example for the particular algorithm described above. Note that the threshold detection is immune to base line shifts or small spikes in the data. Instead, a long consistent temperature rise is required for detection. The algorithm thus effectively models the rise in body temperature due to stress.

Non-limiting examples illustrating the invention will now be provided.

EXAMPLE 1

5

Data were obtained in the following manner:

Three groups of twenty prime bulls (18 months of age) were exposed to periods of stressful handling during a 24 hour period lead up period to slaughter.

10 During this time skin temperature from the ear of each individual animals was measured every 10 minutes. From this an average was calculated and the cumulative variance measured by adding each individual measure difference from the average.

15 Cumulative variances were then plotted against individual ultimate pH values obtained post-slaughter from meat. Variance values against a set ultimate pH value are presented as an average and standard deviation.

Each group of animals was exposed to a different controlled ambient temperature of 16, 20 or 24 degrees Celsius for the trial period.

20

In each case the correlation coefficient r^2 was greater than 0.90 for variance in temperature predicting ultimate pH of meat.

25 Figure 4 presents data for the relationship between variance in temperature and ultimate pH of the meat. Note that below a pH of 6.0 no clear relationship exists. As depicted, variance in body temperature predicts only a pH above 6.0.

For ultimate pH prediction an equation can be calculated to provide an algorithm combining the cumulated variance and the environment temperature.

30

EXAMPLE 2

20 Adult sheep were subjected to various stressors including rounding up, lairage and transport in the 24 hours prior to slaughter. Ear skin measurements were made during this time, every 15 minutes. For each animal, measurements were averaged over the 24 hours and then for each measured point a variance from mean score was given using degrees celsius above or below the mean.

The greatest total individual variance was ranked numerically as 10 and the others normalised as a dividend of this. These variances were then correlated with the ultimate pH obtained from the meat of the slaughtered animals. The results are shown in Figure 5 which shows relationship of variance in skin temperature around a mean value over 24 hours in sheep correlated against their ultimate pH. The correlation coefficient is displayed. This data suggests that in sheep, as for cattle, measurement of variation in skin or body temperature over a period prior to slaughter can predict the ultimate meat quality.

EXAMPLE 3

A group (14) of adult sheep being monitored developed respiratory and parasitic infections. Monitored ear skin temperatures showed good correlation (correlation coefficient of 0.81) with rectal temperatures in terms of fever peaks and return to normal body temperatures with treatment.

The data plotted in Figure 6 supports the notion that ear skin or ear canal temperature can be used to measure pathophysiological states that have accompanying febrile symptoms and recovery from these states.

It will be appreciated that the above description is provided by way of example only and that variations in both the materials and techniques used which are known to those persons skilled in the art are contemplated.

REFERENCES

- ¹ Cook, C.J. and Devine C.E. (1990) From farm paddock to slaughter floor: a conundrum of biochemical and physiological effects that influence meat quality. AGMARDT Beef Industry Research Development Conference. NZMPB.
- ² Purchas, R.W. (1990) An assessment of the role of pH differences in determining the relative tenderness of meat from bulls and steers. Meat Sciences 27, 129-140.
- ³ Watanabe, A., Daly, C.C. and Devine C.E. (1995) The effects of ultimate pH of meat on the tenderness changes during ageing. Meat Science 42, 67-78.
- ⁴ Jacobson, L.H. and Cook, C.J. (1997) The effect of pre-transport cattle management on stress, metabolism and carcass weight of bulls. In: Proceedings of the 43rd International Congress on Meat Science and Technology. Auckland, NZ, pp302-303.
- ⁵ Jacobson, L.H., Cook, C.J., Hodgetts, B.V. and Dean, J.M. The effect of pre-transport on on-farm holding and supplementary feeding, on welfare and meat characteristics of bulls subsequently transported for slaughter. September 1997 . (Funding Milestone, MRDC).
- ^A Devine C.E. and Chrystall, B.B, (1992) Meat Science, in encyclopedia of Food Science and Technology, ed Hui, Y.H., WileyInterscience, John Wiley and Sons, Inc., New York 17081723.
- ^B Devine C.E. and Chrystall, B.B. (1989) High ultimate pH in sheep in Darkcutting in cattle and sheep. Proceedings of an Australian Workshop. Pp 5565 Ed. S.U. Fabiansson, W.R. Shorthose and R.D. Warner AMLRDC, Sydney Australia.

- ^c Devine C.D. Graafhuis, A.E. Muir, P.D. and Chrystall, B.B. (1994) The effect of growth rate and ultimate pH on meat quality of lambs. Meat Sci. 36 143-150

- 5 All US references cited in the text of this specification are incorporated herein by reference.

093343 04300
T00240 "SH T0280

CLAIMS:

1. A method of indicating pH levels in an animal, the method comprising:
 - a) obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
 - c) comparing the results of the algorithm to a predetermined threshold.
2. A method of indicating pH levels in an animal, the method comprising:
 - a) obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals;
 - b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
 - c) correlating the results of the algorithm with the pH standard.
3. The method as claimed in claim 1 or claim 2 wherein ten or more measurements corresponding to body temperature are taken.
4. The method as claimed in any one of the preceding claims wherein the measurements are taken for a predetermined time period.
5. The method as claimed in claim 4 wherein the predetermined time period is at least 12 hours.
6. The method as claimed in claim 4 or claim 5 wherein the predetermined time period extends up to 24 hours.
7. The method as claimed in any one of the claims wherein the algorithm is applied at the end of the predetermined time period.

8. The method as claimed in claim 7, wherein b) further comprises:
determining that animal's average mean temperature reading over the
predetermined time period;
5 calculating the variance between each measurement taken under a) and the mean
determined; and
adding all variances to obtain the cumulative temperature variance score.
9. The method as claimed in any one of claims 1 to 6 wherein the algorithm is applied
10 progressively.
10. The method as claimed in claim 9 wherein the algorithm is applied progressively as
each measurement corresponding to body temperature is taken.
11. The method as claimed in claim 9 or claim 10 wherein c) is conducted after each
15 application of the algorithm.
12. The method as claimed in any one of the preceding claims wherein c) comprises
comparing the results of the algorithm to a predetermined threshold and further, in
the event of the threshold being exceeded, providing an indication of the threshold
20 being exceeded.
13. The method as claimed in claim 12 further including setting the animal aside for a
predetermined animal withholding period in the event of the threshold being
25 exceeded.
14. The method as claimed in any one of claims 9 to 13 wherein a mean is calculated
progressively as each measurement corresponding to temperature is taken.

15. The method as claimed in any one of claims 9 to 13 wherein the algorithm is as follows:

where:

- 5 t_{ear} is the instantaneous ear temperature;
 $t_{ambient}$ is the instantaneous ambient air temperature;
- d is the difference between ear and ambient temperatures;
 $fast$ is the fast-response filter element;
- 10 $slow$ is the slow response filter element;
 v is the integral of the difference between the two filter elements;
- c_1 is the time constant of the fast filter;
 c_2 is the time constant of the slow filter;
- 15 Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

- $n=1$
 $d_0 = t_{ear} - t_{ambient}$
- 20 $fast_0 = d_0$
 $slow_0 = d_0$
 $v_0 = 0$

and where at each sampling interval:

- 25 $d_n = t_{ear} - t_{ambient}$
- $fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$
 $slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$

- 30 then: $v_n = v_{n-1} + (fast_n - slow_n)$.

16. The method as claimed in claim 2 wherein an indication of a pH level greater than 5.8 indicates meat of poor quality.

5

17. The method as claimed in any one of the preceding claims wherein the measurements are taken on the outer part of the animal's body.

10

18. The method as claimed in claim 17 wherein skin temperature measurements are taken and compensation is provided for ambient temperature and/or solar radiation.

19. The method as claimed in claim 17 wherein measurements are taken in the ear canal of the animal.

15

20. A method of providing an indication of stress levels in an animal, the method comprising:

- a) obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold.

20

21. A method of providing an indication of stress levels in an animal, the method comprising:

- a) obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a) which algorithm cumulatively takes account of variations in body temperature over time; and
- c) correlating the results of the algorithm with a stress standard.

25

30

22. The method as claimed in claim 20 or claim 21 wherein ten or more measurements corresponding to body temperature are taken.
23. The method as claimed in any one of claims 20 to 22 wherein the measurements are taken for a predetermined time period.
24. The method as claimed in claim 23 wherein the predetermined time period is at least 12 hours.
25. The method as claimed in claim 23 or claim 24 wherein the predetermined time period extends up to 24 hours.
26. The method as claimed in any one of the claims 20 to 25 wherein the algorithm is applied at the end of the predetermined time period.
27. The method as claimed in claim 26, wherein b) further comprises:
- a) determining that animal's mean body temperature reading over the predetermined time period;
 - b) calculating the variance between each measurement taken under a) and the mean determined; and
 - c) adding all variances to obtain the cumulative temperature variance score.
28. The method as claimed in any one of claims 20 to 25 wherein the algorithm is applied progressively.
29. The method as claimed in claim 28 wherein the algorithm is applied progressively as each measurement corresponding to body temperature is taken.
30. The method as claimed in claim 28 or claim 29 wherein c) is conducted after each application of the algorithm.

31. The method as claimed in any one of claims 20 to 30 wherein c) comprises comparing the results of the algorithm to a predetermined threshold and further, in the event of the threshold being exceeded, providing an indication of the threshold being exceeded.

32. The method as claimed in claim 31 further including setting the animal aside for at least a predetermined animal withholding period in the event of the threshold being exceeded.

33. The method as claimed in any one of claims 28 to 32 wherein a mean is calculated progressively as each measurement corresponding to temperature is taken.

34. The method as claimed in any one of claims 28 to 32 wherein the algorithm is as follows:

where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

- 39 -

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

35. The method as claimed in any one of claims 20 to 34 wherein the measurements are taken on the outer part of the animal's body.
36. The method as claimed in claim 35 wherein skin temperature measurements are taken and compensation is provided for ambient temperature and/or solar radiation.
37. The method as claimed in claim 35 wherein measurements are taken in the ear canal of the animal.
38. A method of measuring stress levels in an animal, the method comprising measuring the animal's pH level using a method of any one of claims 1 to 19, a pH level greater than 5.8 to 6.2 indicating a stressed animal.

39. A method of providing an indication of meat quality in an animal, the method comprising:

- a) obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a), which algorithm cumulatively takes account of variations in body temperature over time; and
- c) comparing the results of the algorithm to a predetermined threshold.

40. A method of providing an indication of meat quality in an animal, the method comprising:

- a) obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals;
- b) applying an algorithm to the measurements obtained from a), which algorithm cumulatively takes account of variations in body temperature over time; and
- c) correlating the results of the algorithm with a meat tenderness standard.

41. The method as claimed in claim 39 or claim 40 wherein ten or more measurements corresponding to body temperature are taken.

42. The method as claimed in any one of claims 39 to 41 wherein the measurements are taken for a predetermined time period.

43. The method as claimed in claim 42 wherein the predetermined time period is at least 12 hours.

44. The method as claimed in claim 42 wherein the predetermined time period extends up to 24 hours.

45. The method as claimed in any one of claims 39 to 44 wherein the algorithm is applied at the end of the predetermined time period.

46. The method as claimed in claim 45, wherein b) further comprises:
determining that animal's mean body temperature reading over the predetermined
time period;
5 calculating the variance between each measurement taken under a) and the
mean determined; and
adding all variances to obtain the cumulative temperature variance score.
47. The method as claimed in any one of claims 39 to 44 wherein the algorithm is
10 applied progressively.
48. The method as claimed in claim 47 wherein the algorithm is applied progressively
as each measurement corresponding to body temperature is taken.
49. The method as claimed in claim 47 or 48 wherein c) is conducted after each
15 application of the algorithm.
50. The method as claimed in any one of claims 39 to 49 wherein c) comprises
comparing the results of the algorithm to a predetermined threshold and further, in
20 the event of the threshold being exceeded, providing an indication of the threshold
being exceeded.
51. The method as claimed in claim 50 further including setting the animal aside for
a predetermined animal withholding period in the event of the threshold being
25 exceeded.
52. The method as claimed in any one of claims 47 to 51 wherein a mean is calculated
progressively as each measurement corresponding to temperature is taken.

53. The method as claimed in any one of claims 47 to 51 wherein the algorithm is as follows:

where:

5 t_{ear} is the instantaneous ear temperature;
 $t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

10 $slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

15 Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

20 $fast_0 = d_0$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

25 $d_n = t_{ear} - t_{ambient}$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n).$

- 43 -

54. The method as claimed in any one of claims 39 to 53 wherein the measurements are taken on the outer part of the animal's body.

5 55. The method as claimed in claim 54 wherein skin temperature measurements are taken and compensation is provided for ambient temperature and/or solar radiation.

56. The method as claimed in claim 54 wherein measurements are taken in the ear canal of the animal.

10 57. A system for providing an indication of meat quality in an animal to be slaughtered, the system including:

15 a body mountable measurement device for obtaining measurements corresponding to the body temperature of the animal at periodic sampling intervals over a period of between 3-36 hours;

20 a processor having an input means to receive the measurements from the measurement device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output means for the result of the algorithm.

25 58. The system as claimed in claim 57 wherein the algorithm is as follows:
determine the animal's mean body temperature from the measurements;
calculate the variance between each measurement and the mean; and
add all variances to obtain a cumulative variance score.

59. The system as claimed in claim 57 wherein the algorithm is as follows:
where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

5 v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

10

where initially:

$$n=1$$

$$d_0 = t_{ear} - t_{ambient}$$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

25

60. The system as claimed in any one of claims 57 to 59 wherein the system is embodied in an all-in-one indicator device.

61. The system as claimed in claim 60 wherein the device is provided in the form of an ear tag.

30

- 45 -

62. The system as claimed in claim 61 wherein the tag incorporates the measurement device.

5 63. The system as claimed in any one of claims 57 to 59, wherein the processor is provided by way of a remote computer.

64. The system as claimed in any one of claims 57 to 63 wherein the processor is adapted to output a numeric value from a comparison with a meat tenderness scale.

10 65. The system as claimed in any one of claims 57 to 63 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

15 66. The system as claimed in claim 65 further including an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold.

67. The system as claimed in claim 66 wherein the indicator is also operable to provide an indication that the system is functioning.

20 68. A system for indicating cumulative stress in an animal, the system including:
a body mountable measurement device for obtaining measurements corresponding to outer body temperature of the animal at periodic time intervals over a period of between 3-6 hours;
a processor having an input to receive measurements from the measurement
25 device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

30 69. The system as claimed in claim 68 wherein the algorithm is as follows:
determine the animal's average body temperature from the measurements;
calculate the variance between each measurement and the average; and

add all variances to obtain a cumulative variance score.

70. The system as claimed in claim 68 wherein the algorithm is as follows:

5 where:

t_{ear} is the instantaneous ear temperature;

$t_{ambient}$ is the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

10 $fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

15 c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

where initially:

$$n=1$$

20 $d_0 = t_{ear} - t_{ambient}$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

25 and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

30

- 47 -

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

5 71. The system as claimed in any one of claims 68 to 70 wherein the system is embodied in an all-in-one indicator device.

72. The system as claimed in claim 71 wherein the device is provided in the form of an ear tag.

10 73. The system as claimed in claim 72 wherein the tag incorporates the measurement device.

74. The system as claimed in any one of claims 68 to 70 wherein the processor is provided by way of a remote computer.

15 75. The system as claimed in any one of claims 68 to 74 wherein the processor is adapted to output a numeric value or comparison with a meat tenderness scale.

20 76. The system as claimed in any one of claims 68 to 74 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

77. The system as claimed in claim 76 further including an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold.

25 78. The system as claimed in claim 77 wherein the indicator is operable to indicate that the system is functioning.

30 79. A system of indicating pH in an animal, the system including:
a body mountable measurement device for obtaining measurements corresponding to outer
body temperature of the animal at periodic time intervals over a period of between
3-6 hours;
a processor having an input to receive measurements from the measurement

device, the processor operable to implement an algorithm to the measurements, which algorithm cumulatively takes account of variations in body temperature over time, wherein the processor has an output for the result of the algorithm.

5

80. The system as claimed in claim 79 wherein the algorithm is as follows:
determine the animal's average body temperature from the measurements;
calculate the variance between each measurement and the average; and
add all variances to obtain a cumulative variance score.

10

81. The system as claimed in claim 79 wherein the algorithm is as follows:

where:

t_{ear} be the instantaneous ear temperature;

15

$t_{ambient}$ be the instantaneous ambient air temperature;

d is the difference between ear and ambient temperatures;

$fast$ is the fast-response filter element;

$slow$ is the slow response filter element;

20

v is the integral of the difference between the two filter elements;

c_1 is the time constant of the fast filter;

c_2 is the time constant of the slow filter;

Time constants are such that $c_1 > c_2$, $0 < c_1 < 1$, $0 < c_2 < 1$;

25

where initially:

$n=1$

$d_0 = t_{ear} - t_{ambient}$

$$fast_0 = d_0$$

$$slow_0 = d_0$$

$$v_0 = 0$$

5 and where at each sampling interval:

$$d_n = t_{ear} - t_{ambient}$$

$$fast_n = (1 - c_1) * fast_{n-1} + c_1 * d_n$$

$$slow_n = (1 - c_2) * slow_{n-1} + c_2 * d_n$$

10

then: $v_n = v_{n-1} + (fast_n - slow_n)$.

82. The system as claimed in any one of claims 79 to 81 wherein the system is embodied in an all-in-one indicator device.

83. The system as claimed in claim 82 wherein the device is provided in the form of an ear tag.

84. The system as claimed in claim 83 wherein the tag incorporates the measurement device.

85. The system as claimed in any one of claims 70 to 81 wherein the processor is provided by way of a remote computer.

86. The system as claimed in any one of claims 79 to 85 wherein the processor is adapted to output a numeric value from a comparison with a meat tenderness scale.

87. The system as claimed in any one of claims 79 to 85 wherein the processor is operable to compare the output of the algorithm to a predetermined threshold.

- 50 -

88. The system as claimed in claim 87 further including an indicator to indicate where the output of the algorithm has exceeded the predetermined threshold.

5 89. A temperature sensing device including:
a tag having an attachment portion to extend through a body part of an animal, the tag incorporating an indicator means; and
one or more animal temperature sensors disposed on/in the attachment portion for contact with the animal during use.

10 90 The tag as claimed in claim 89 wherein the tag is an ear tag.

15 91. The tag as claimed in claim 89 or claim 90 wherein, an ambient temperature sensor is also provided on the tag.

92. The tag as claimed in any one of claims 89 to 91 wherein a comparison means is provided to compare the ambient temperature with the animal temperature.

20 93. The tag as claimed in claim 92 wherein an indicator is disposed on the tag, the indicator being responsive to the comparison means.

25 94. The tag as claimed in any one of claims 89 to 93 wherein the tag comprises a one piece moulded body.

95. The tag as claimed in any one of claims 92 to 94 wherein a comparison means is provided to compare the ambient temperature with the animal temperature.
- 5 96. The tag as claimed in claim 95 wherein an indicator is disposed on the tag, the indicator being responsive to the comparison means.
97. The tag as claimed in any one of claims 92 to 96 wherein the or each sensor is provided on/in the attachment portion.
- 10 98. The tag as claimed in any one of claims 92 to 97 wherein the tag comprises a one piece moulded body.

09830445 043004

1/5

Figure 1

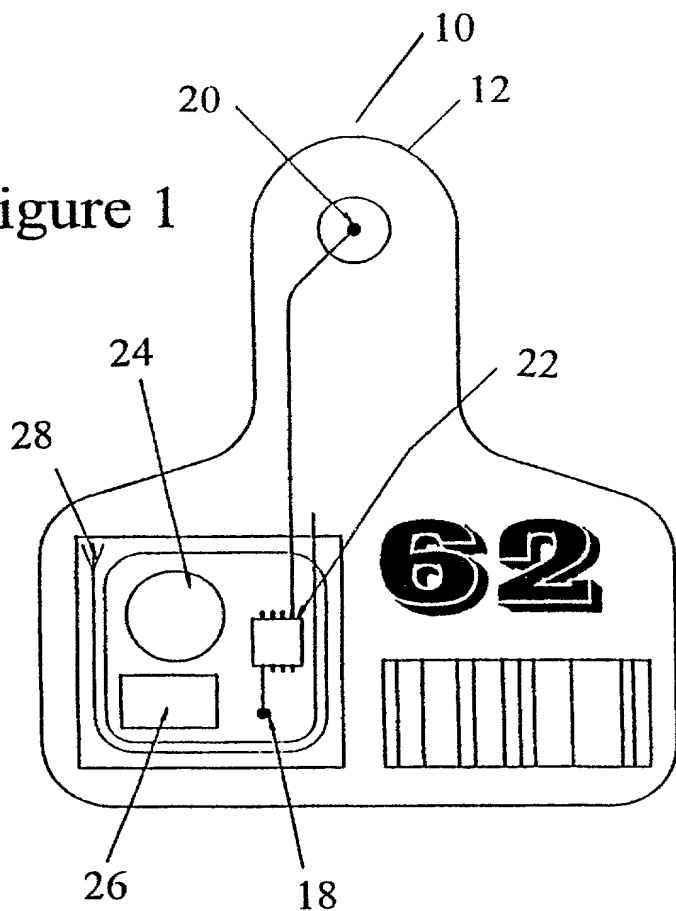


Figure 2


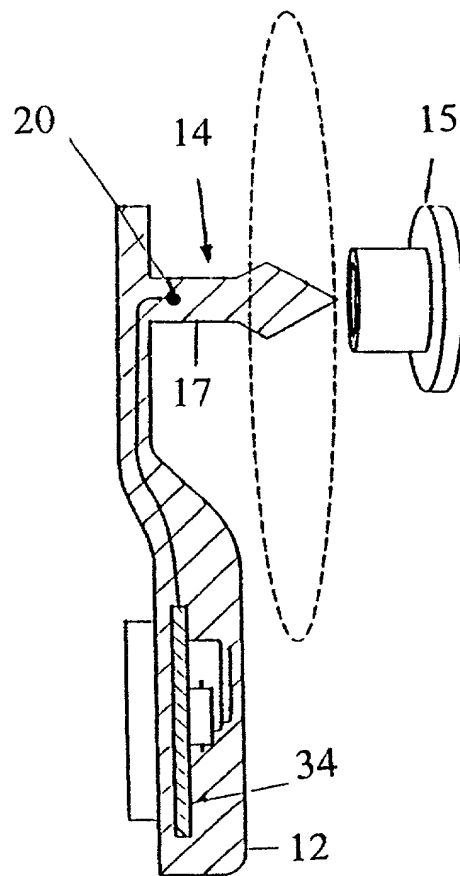


Figure 3

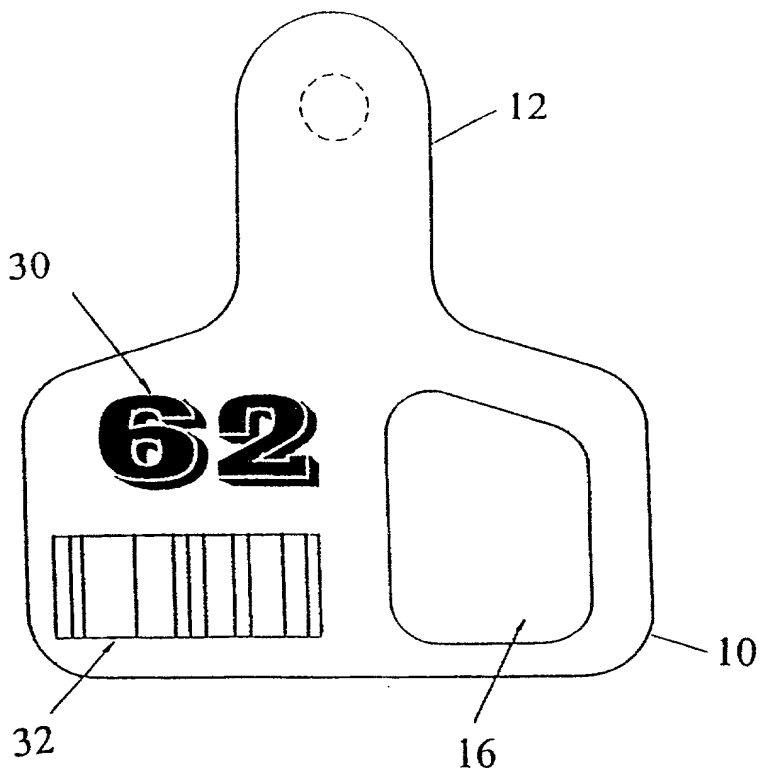

2/5

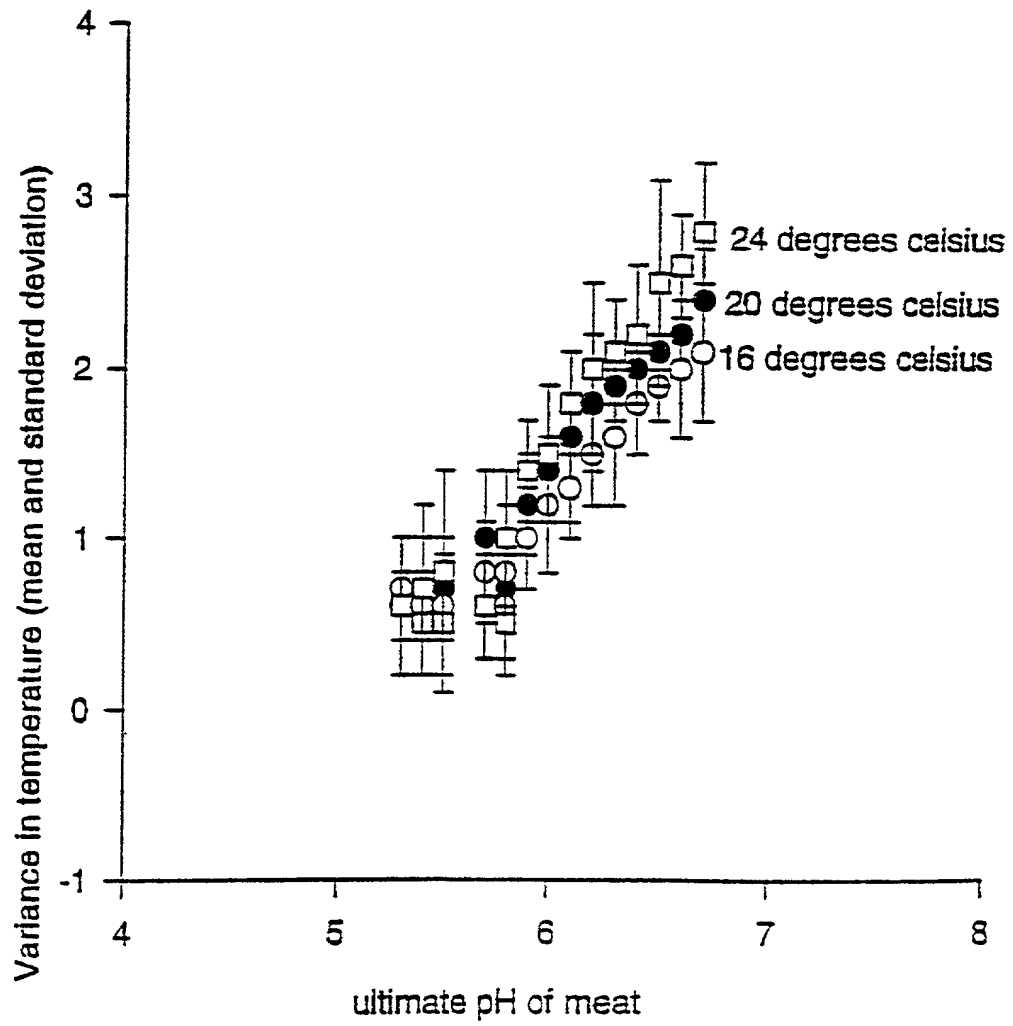


Figure 4

3/5

Figure 5



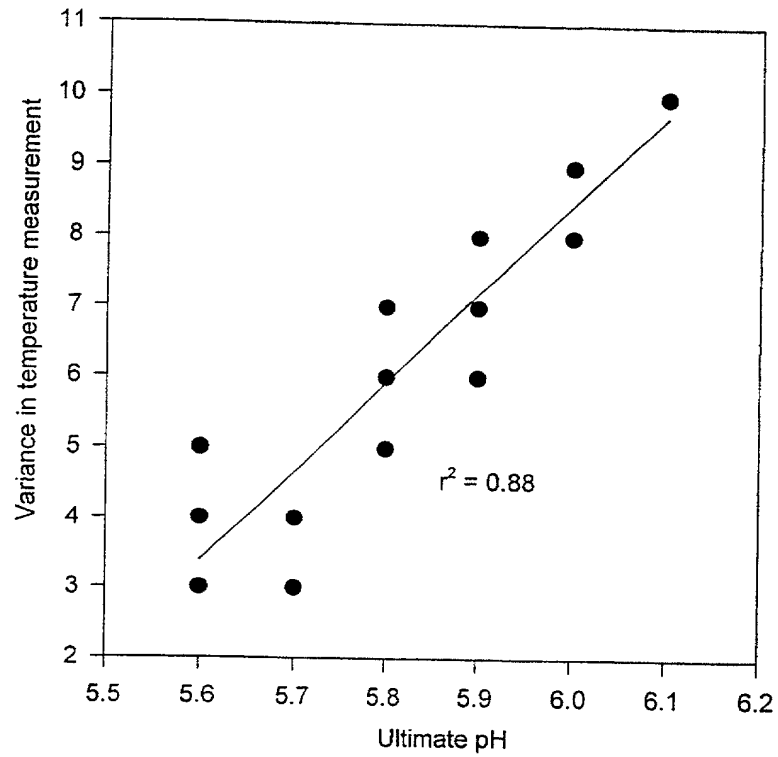


Figure 6

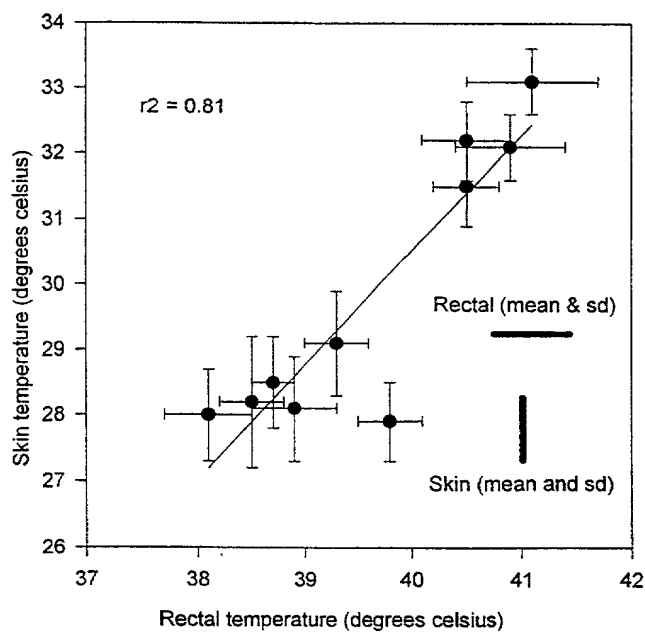

4/5

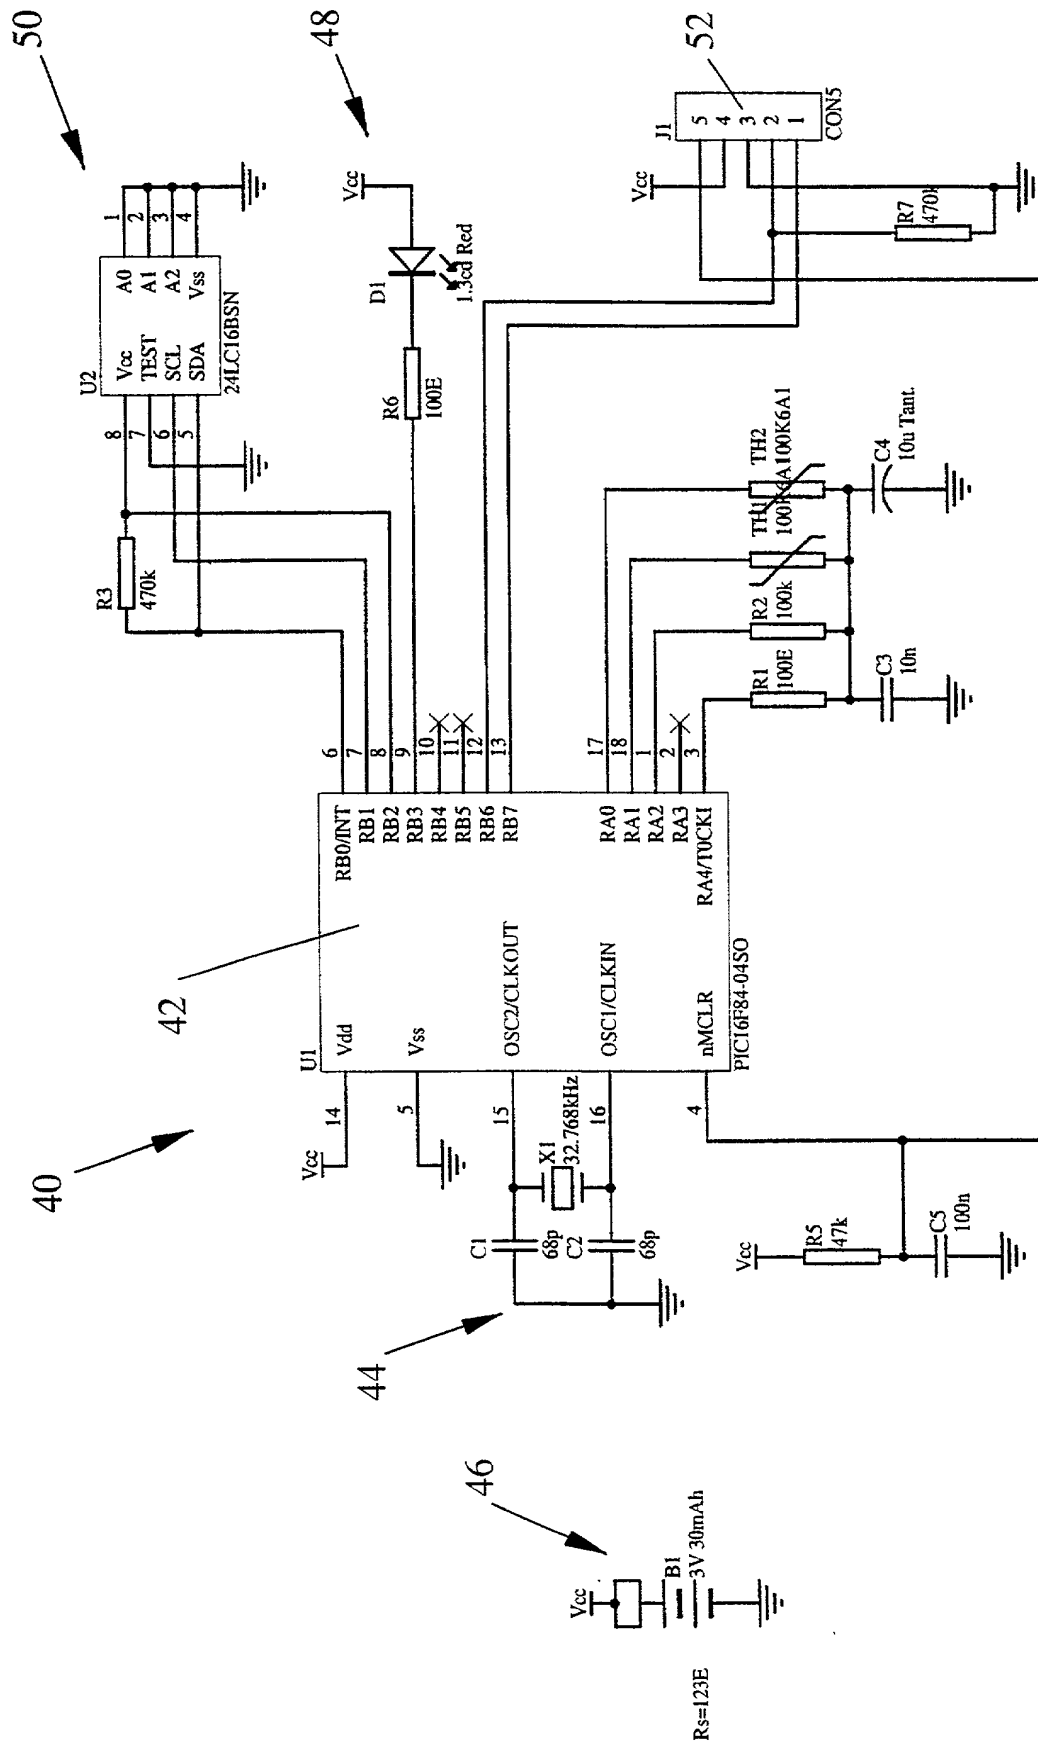

5/5

Eartag Stress Detection Algorithm Example

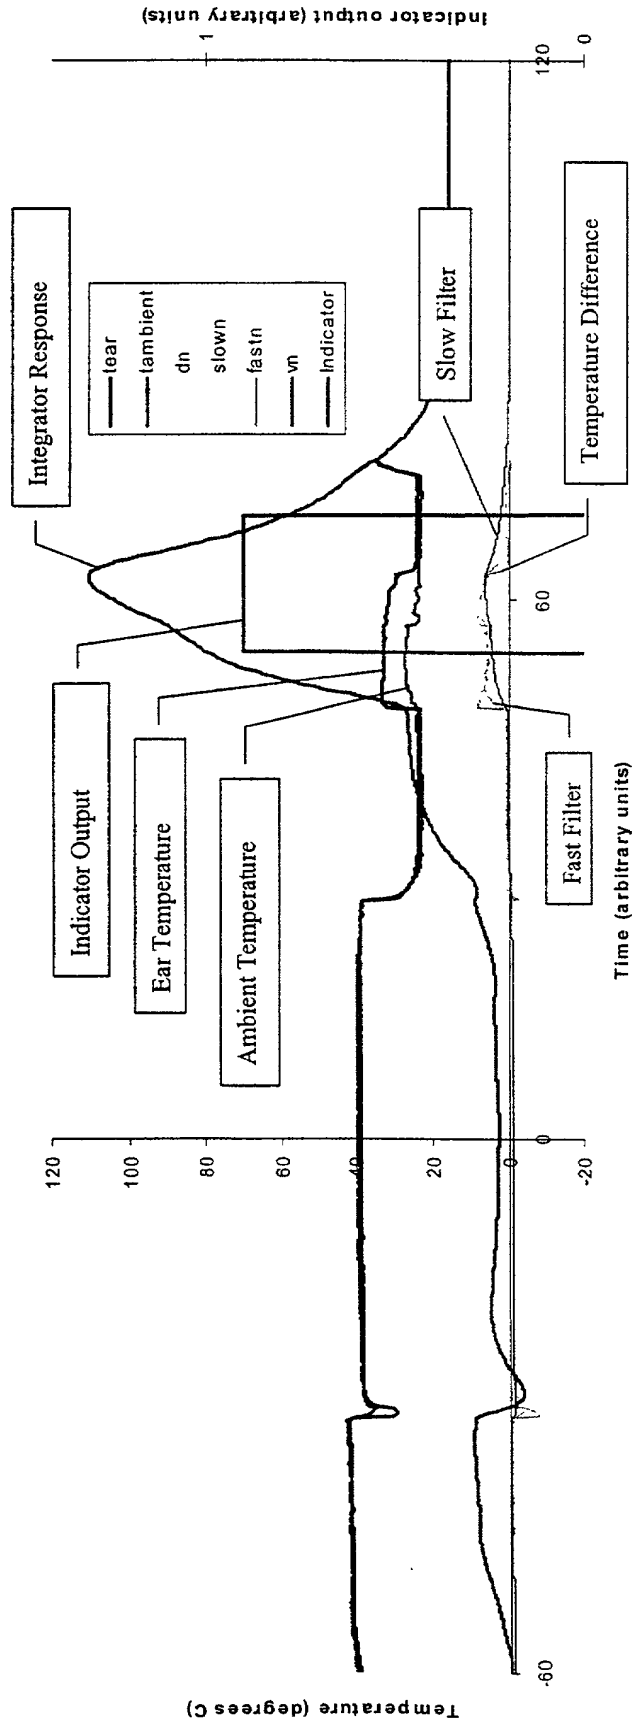


Figure 8

12-THIR-2001 12-20 H. J. FISK 04 4 412333 1.84/81

UNITED STATES PATENT

Attorney Docket No. P439978 TJH/dah

Form P1

COMBINED DECLARATION and POWER OF ATTORNEY
(Utility, Design, National Stage of PCT)

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type:

(Check one applicable item below)

- ☐ utility patent application
☐ design patent application
☒ national stage of PCT patent application

INVENTORSHIP IDENTIFICATION

My residence, post office address and citizenship are as stated below, next to my name. I believe that I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter that is claimed, and for which a patent is sought on the invention entitled:

TITLE OF INVENTION²

DETERMINING MEAT QUALITY OF A LIVE ANIMAL

SPECIFICATION IDENTIFICATION

the specification of which:

(complete (a), (b), or (c))

(a) ☐ is attached hereto.

(b) ☐ was previously filed _____, as United States Patent
Application Serial No. _____

(c) ☒ was described and claimed in PCT International Application No.
PCT/NZ99/00177, filed on 26 October 1999. ✓

09830145-042001

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in 34, Code of Federal Regulations, § 1.56.

FOREIGN PRIORITY CLAIM

(35 U.S.C. § 119(a)-(d))

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))¹

(d) ☐ no such applications have been filed.

(e) ☒ such applications have been filed as follows.

Note: Where item (c) is entered above and the International Application which designated the U.S. itself claimed priority check item (e), enter the details below, and make the priority claim

PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS⁴ (6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119(a)-(d)

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119	
New Zealand	332473 —	23 October 1998 —	<input checked="" type="checkbox"/> YES	NO <input type="checkbox"/>
			<input type="checkbox"/> YES	NO <input type="checkbox"/>
			<input type="checkbox"/> YES	NO <input type="checkbox"/>
			<input type="checkbox"/> YES	NO <input type="checkbox"/>
			<input type="checkbox"/> YES	NO <input type="checkbox"/>

ALL FOREIGN APPLICATION(S), IF ANY, PRIOR TO ⁵
THE EARLIEST PRIORITY DATE CLAIMED HEREIN

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)

POWER OF ATTORNEY

I hereby appoint the following attorney(s) and/or agent(s): RICK D. NYDEGGER, Registration No. 28,651; DAVID O. SEELEY, Registration No. 30,148; JONATHAN W. RICHARDS, Registration No. 29,843; MICHAEL F. KRIEGER, Registration No. 35,232; BRADLEY K. DeSANDRO, Registration No. 34,521; JOHN M. GUYNN, Registration No. 36,153; CHARLES L. ROBERTS, Registration No. 32,434; GREG M. TAYLOR, Registration No. 34,263; DANA L. TANGREN, Registration No. 37,246; ERIC L. MASCHOFF, Registration No. 36,596; KEVIN B. LAURENCE, Registration No. 38,219; ROBYN L. PHILLIPS, Registration No. 39,330; DAVID B. DELLENBACH, Registration No. 39,166; JOHN N. GREAVES, Registration No. 40,362; R. BURNS ISRAELSEN, Registration No. 42,685; MICHAEL T. SANDERSON, Registration No. 43,082, with offices at WORKMAN, NYDEGGER & SEELEY, 1000 Eagle Gate Tower, 60 East South Temple, Salt Lake City, UT 84111 and Telephone (801) 533-9800, with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the Letters Patent, and to transact all business in the Patent and Trademark Office connected therewith.

All correspondence and telephone communications should be directed to:

DANA L. TANGREN
WORKMAN, NYDEGGER & SEELEY
1000 Eagle Gate Tower
60 East South Temple
Salt Lake City, Utah 84111
Telephone (801) 533-9800
Facsimile (801) 328-1707

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

NOTE: Carefully indicate the family (or last) name, as it should appear on the filing receipt and all other documents.

Full name of sole or first inventor

1-00 Christian

(GIVEN NAME)

John

(MIDDLE INITIAL OR NAME)

COOK

FAMILY (OR LAST NAME)

Inventor's signature [Signature]

Date 10.04.2001

Country of Citizenship New Zealand ✓

Residence 70 Nevada Road, Hamilton, New Zealand NZX

Post Office Address - SAME AS ABOVE -

09030145 042001